

Accessories Replacement Cover

Fiberglass Opaque Replacement Cover with Viewing Window for Diamond Shield 10 x 8 Inches



Catalog
Number

DSW1008CVR

UPC

785928911460

List Price

\$273.63

DESCRIPTION


10H x 8W Inches Diamond Shield Series
Fiberglass Enclosure Cover Only with Viewing
Window. To be used as a replacement cover

APPLICATION

Suited for high-end and harsh industrial applications

FEATURES

- Flush bonded window replacement cover for Diamond Shield Series
- High temperature; flame retardant; non corrosive; environmental designs
- Results in an environmentally sealed; environmentally sound space
- High impact resistance
- Double insulated material no incidental electrical contact

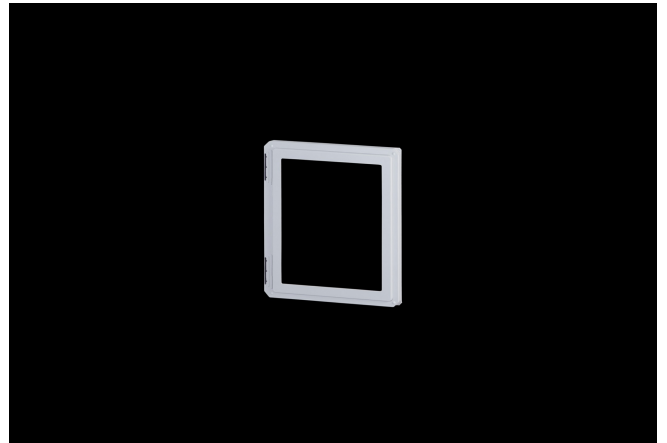

- Solid construction in a lightweight design
- UV resistant

General Information

| | |
|--|--|
| Color | Gray |
| Cover Type | Window |
| Material | Fiberglass |
| Back Panel Screw Size | |
| Back Panel Recommended Torque | |
| Back Panel Screw Material | |
| Cover Screw Size | #10-32 x 1-1/4 |
| Cover Screw Recommended Torque | 20-24 in-lbs |
| Cover Screw Material | 304 SS |
| Mounting Foot Screw Size | |
| Mounting Foot Screw Recommended Torque | |
| Installation Mounting Torque | |
| Gasket Material | Poured In Place (PIP) Polyurethane Seamless |
| Country of Origin | USA |

DIMENSIONS

| | |
|-------------|-------|
| Height (in) | 11.4 |
| Width (in) | 9.8 |
| Height (mm) | 290.1 |
| Width (mm) | 248.9 |

STANDARDS

| | |
|-----------------------------|-----------------|
| Temperature Range °F | -76°F to +274°F |
| Temperature Range °C | -60°C to +134°C |
| Window Temperature Range °F | -26°F to +170°F |
| Window Temperature Range °C | -32°C to +76°C |
| Flammability Rating | UL94-5VA |
| Outdoor Exposure UL746c | (f1) Rated |