

Enclosures **DuraBoxx Series**

Fiberglass Enclosure 7 x 11 x 4 Inches DuraBoxx Series Shallow with Opaque Lift Off Cover



**Catalog
Number**

D7114W

UPC

785928906138.0

List Price

\$210.52


DESCRIPTION

7H x 11W x 4D Inches DuraBoxx Series Shallow Fiberglass Enclosure are suited for indoor or outdoor environments in both commercial and industries environments such as mining, oil, gas, wastewater treatment and petro-chem. Their flush cover design with captive lid screws makes them well suited for high-end electronic applications such as wireless communications and operator interfaces.

APPLICATION

With its sleek design; shallow depths and flush cover these enclosures are suited for high-end electronic applications

FEATURES

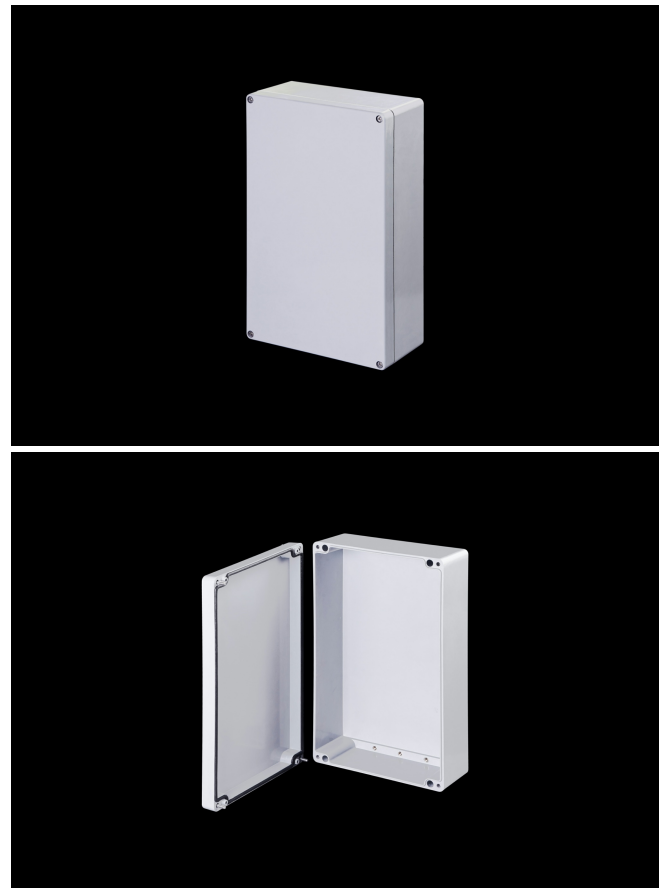

- Flat opaque cover with captive cover screws
- DIN rail mounting capabilities
- Back Panels Available for all sizes

General Information

| | |
|----------------------------------------|------------------------------------------------|
| Color | Gray |
| Cover Type | Opaque |
| Material | Fiberglass |
| Back Panel Screw Size | M6 x 9.5mm |
| Back Panel Recommended Torque | 16-20 in-lbs |
| Back Panel Screw Material | 304 SS |
| Cover Screw Size | M6-1.0 x 35mm |
| Cover Screw Recommended Torque | 20-24 in-lbs |
| Cover Screw Material | 304 SS |
| Mounting Foot Screw Recommended Torque | 20-24 in-lbs |
| Installation Mounting Torque | 20-24 in-lbs Max |
| Metal Inserts | Brass |
| Gasket Material | Poured In Place (PIP) Polyurethane Seamless |
| Country of Origin | India |

DIMENSIONS

| | |
|-------------------|-------|
| Height (in) | 7.0 |
| Width (in) | 11.0 |
| Depth (in) | 4.0 |
| Height (mm) | 177.8 |
| Width (mm) | 279.4 |
| Depth (mm) | 101.6 |
| Usable Depth (in) | 2.9 |
| Usable Depth (mm) | 74.0 |

STANDARDS

NEMA 10250; UL 50; UL 50e; cULus Listed File
UL508A #E64358

CSA Std. C22.2 File LR069014

Type 1; 3; 3S; 4; 4X; 6; 6P; 12

IEC 60529; UL Listed IP66; IP67; IP68
#E362920

Temperature Range °F -26°F to +257°F

Temperature Range °C -32°C to +125°C

Flammability Rating UL94-V0

Outdoor Exposure UL746c (f1) Rated

CE Certified