

Accessories **Environmental Management**

## Hole Plug for 1/2 Inch Conduit



**Catalog  
Number**

REHPSERIES1.5

**UPC**

785928680052

List Price

**\$12.78**

### DESCRIPTION


PluggIt! Hole Plugs Seals Cutouts for 1/2 Inch conduit diameters. PluggIt! hole plugs are submersion and hosedown rated component for use in electrical enclosures UL recognized to type 4X and 6P.

### APPLICATION

Hole Plug used with enclosures which house electrical and electronic controls; instruments; and components

### FEATURES

- PluggIt! Superior corrosion resistance compared to rust-prone carbon steel and other metallic alternatives helps ensure increased enclosure life expectancy.
- Considerably better long-term resistance to UV degradation versus UV-susceptible soft rubber plugs that turn brittle from extreme temperature variations and

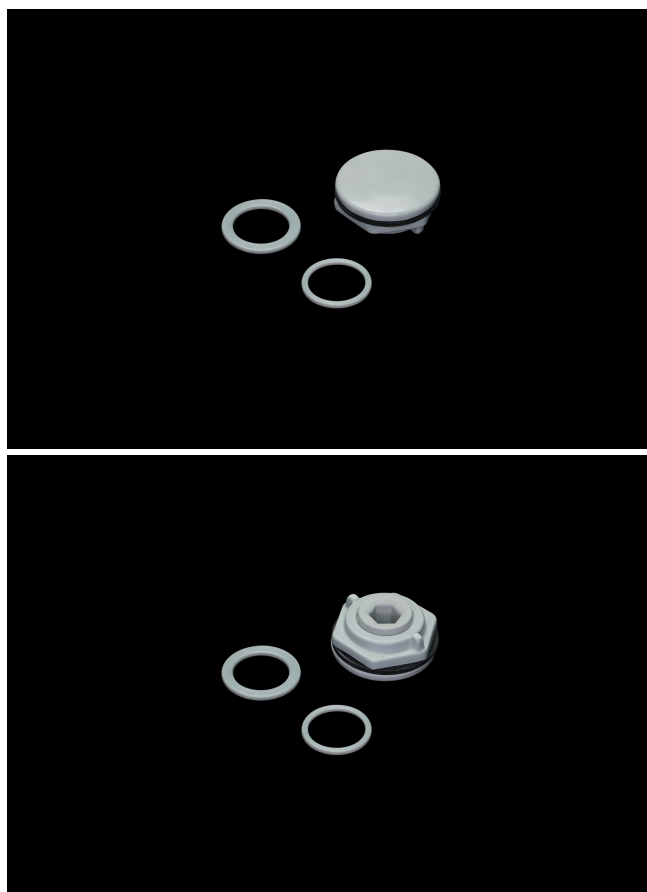

repeated UV exposure.

- Will not create galvanic corrosion associated with dissimilar metals sometimes used in electrical enclosures.
- Maintains all chemical resistance features of current Robroy Enclosures products.
- A submersion/hosedown rated component for use in electrical enclosures UL recognized to type 4X and 6P.

## General Information

|                   |             |
|-------------------|-------------|
| Color             | Gray        |
| Material          | Fiberglass  |
| Gasket Material   | EPDM Rubber |
| Country of Origin | India       |

## DIMENSIONS

|                             |     |
|-----------------------------|-----|
| Common Industry application | 1.0 |
|-----------------------------|-----|

## STANDARDS

|   |                         |
|---|-------------------------|
| NEMA 10250; UL 50; UL 50e; UL Recognized File<br>UL508A #E64358 |                         |
| CSA Std. C22.2  | File LR069014           |
| Type  | 1; 3R; 4; 4X; 6; 6P; 12 |
| IEC 60529; UL Listed<br>#E362920                                | IP66; IP68              |
| Temperature Range °F  | -26°F to +257°F         |
| Temperature Range °C  | -32°C to +125°C         |
| Flammability Rating   | UL94-V0                 |
| Outdoor Exposure UL746c   | (f1) Rated              |