

Accessories Replacement Cover

## Polycarbonate Clear Replacement Cover for Diamond Shield 8 x 8 Inches



Catalog  
Number

DSCC808CVR

UPC

785928911705.0

List Price

**\$158.31**

### DESCRIPTION


8H x 8W Inches Diamond Shield Series  
Polycarbonate Enclosure Clear Cover Only. To be  
used as a replacement cover

### APPLICATION

Suited for high-end and harsh industrial applications

### FEATURES

- Clear polycarbonate replacement cover for Diamond Shield Series
- Maximum visibility to raised panels and control boxes
- High temperature; flame retardant; non corrosive; environmental designs
- Results in an environmentally sealed; environmentally sound space
- High impact resistance

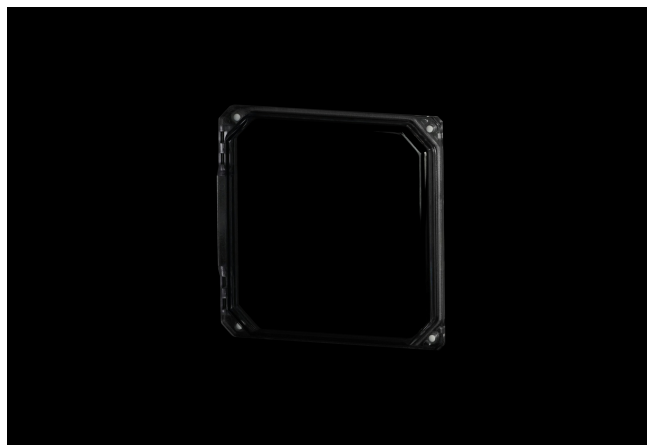

- Double insulated material no incidental electrical contact
- Solid construction in a lightweight design
- UV resistant

## General Information

|  |  |
|--|--|
| Color                                  | Clear  |
| Cover Type                             | Clear  |
| Material                               | Polycarbonate                                  |
| Back Panel Screw Size                  |  |
| Back Panel Recommended Torque          |  |
| Back Panel Screw Material              |  |
| Cover Screw Size                       | #10-32 x 1-1/4                                 |
| Cover Screw Recommended Torque         | 20-24 in-lbs                                   |
| Cover Screw Material                   | 304 SS   |
| Mounting Foot Screw Size               |  |
| Mounting Foot Screw Recommended Torque |  |
| Installation Mounting Torque           |  |
| Gasket Material                        | Poured In Place (PIP)<br>Polyurethane Seamless |
| Country of Origin                      | USA  |

## DIMENSIONS

|             |       |
|-------------|-------|
| Height (in) | 9.4   |
| Width (in)  | 9.8   |
| Height (mm) | 238.5 |
| Width (mm)  | 248.2 |

## STANDARDS

NEMA 10250; UL 50; UL 50e; cULus Listed File  
UL508A #E64358

CSA Std. C22.2 cULus Listed File  
#E64358

Type 1; 3; 3S; 4; 4X; 12; 13

IEC 60529; UL Listed IP66  
#E362920

UL1741 UL Listed File #E333478

Temperature Range °F -76°F to +274°F

Temperature Range °C -60°C to +134°C

Window Temperature Range -40°F to +248°F  
°F

Window Temperature Range -40°C to +120°C  
°C

Flammability Rating UL94-5VA

NFPA No. 101 Flame Spread Class A(1)

Outdoor Exposure UL746c (f1) Rated

CE Certified