



Enclosures PushButton Series

ISO

Polycarbonate Enclosure 5 x 3 x 3 Inches Push Button Series 2 Hole 30 mm with Opaque Lift Off Cover



Catalog Number CFPC2PB

UPC

785928564604.0

List Price **\$90.68**

DESCRIPTION


5H x 3W x 3D Inches Push Button Series Polycarbonate Enclosure is an in-line enclosures designed to be a true push button station and houses pushbuttons, switches and pilot lights in 30mm configurations. Designed for general electrical and electronic applications or any application that has associated environmental concerns. Custom hole configurations available upon request.

APPLICATION

For use in many MRO and OEM applications

FEATURES

•Memory retaining continuous polyurethane gasket

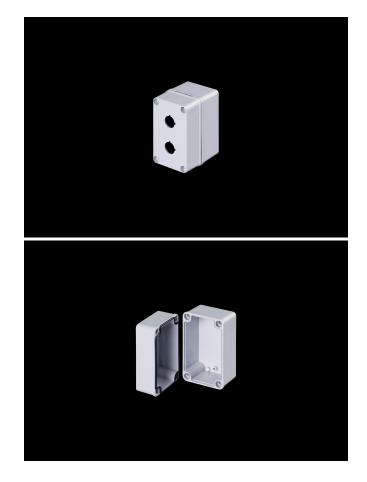





- Captive polymer cover screws
- Corrosion resistant polycarbonate
- Submersible; non corrosive; environmental design
- High Impact Resistance

General Information

| Color | Gray |
|-----------------------------------|--|
| Cover Type | Push Button |
| Material | Polycarbonate |
| Cover Screw Size | Custom |
| Cover Screw Recommended Torque | 16-20 in-lbs |
| Cover Screw Material | Polycarbonate |
| Installation Mounting Torque | 25-30 in-lbs Max |
| Metal Inserts | |
| Gasket Material | Poured In Place (PIP) Polyurethane Seamless |
| Country of Origin | USA |

DIMENSIONS

| Height (in) | 5.0 |
|-------------------|-------|
| Width (in) | 3.0 |
| Depth (in) | 3.0 |
| Height (mm) | 127.0 |
| Width (mm) | 76.2 |
| Depth (mm) | 76.2 |
| Usable Depth (in) | 3.3 |
| Usable Depth (mm) | 83.0 |



Enclosures

STANDARDS

| NEMA 10250; UL 50; UL 50e; UL508A | cULus Listed File #E319779 |
|--------------------------------------|-------------------------------|
| CSA Std. C22.2 | cULus Listed File #E319779 |
| Туре | 1; 3R; 4; 4X; 6P; 12 |
| IEC 60529; UL Listed #E362920 | IP66; IP68 |
| Temperature Range °F | -40°F to +248°F |
| Temperature Range °C | -40°C to +120°C |
| Flammability Rating | UL94-5VA |
| Outdoor Exposure UL746c | (f1) Rated |
| CE | Certified |