

Enclosures **Starke Series**

## Polycarbonate Enclosure Small 3 x 2 x 2 Inches Starke Series with Opaque Lift Off Cover



**Catalog Number**

ST060555W

**UPC**

785928571695.0

List Price

**\$34.45**

### DESCRIPTION


3H x 2W x 2D Inches Starke Series Small Polycarbonate Enclosure with Opaque (ST) Screw Cover (4 Cover Screws, Lift-off Configuration) features flush sides making it ideal for OEM designed product. Raised bosses accommodate back panel mounting and are used for remote sensor mounting and small electronic controls in any environment.

### APPLICATION

Small; simple design ideal for OEMs in the electronics market; circuit boards and wiring applications

### FEATURES

- Opaque Cover

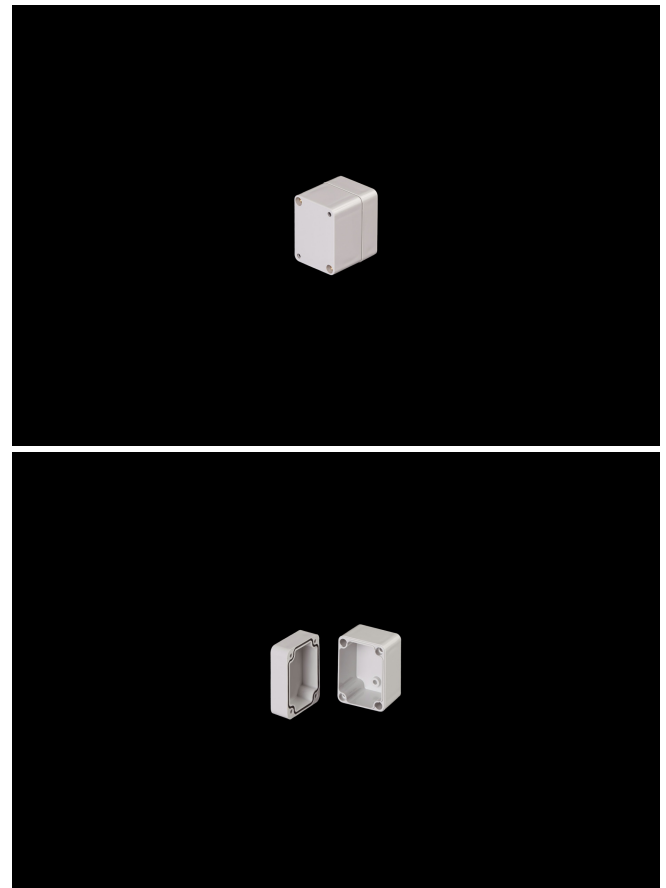

- Multiple depths available in most sizes
- Resistant to harsh environments
- Flush sides for that perfect fit
- Multiple molded in bosses for a variety of mounting solutions
- Back Panels Available for all sizes

## General Information

---

|                               |  |
|-------------------------------|--|
| Color                         | Gray   |
| Cover Type                    | Opaque   |
| Material                      | Polycarbonate                                  |
| Back Panel Screw Size         | Plastite 48 #8                                 |
| Back Panel Recommended Torque | 12-16 in-lbs                                   |
| Back Panel Screw Material     | 304 SS   |
| Cover Screw Material          | 304 SS   |
| Installation Mounting Torque  | 25-30 in-lbs Max                               |
| Metal Inserts                 | Brass  |
| Gasket Material               | Poured In Place (PIP)<br>Polyurethane Seamless |
| Country of Origin             | Germany  |

## DIMENSIONS

---

|                   |      |
|-------------------|------|
| Height (in)       | 3.0  |
| Width (in)        | 2.0  |
| Depth (in)        | 2.0  |
| Height (mm)       | 76.2 |
| Width (mm)        | 50.8 |
| Depth (mm)        | 50.8 |
| Usable Depth (in) | 1.7  |
| Usable Depth (mm) | 44.0 |

## STANDARDS

---

NEMA 10250; UL 50; UL 50e; cULus Listed File  
UL508A #E64358

CSA Std. C22.2 cULus Listed File  
#E64358

Type 1; 3R; 4; 4X; 12

IEC 60529; UL Listed IP66  
#E362920

Temperature Range °F -40°F to +212°F

Temperature Range °C -40°C to +100°C

Flammability Rating UL94-V2

Outdoor Exposure UL746c (f1) Rated

CE Certified