



**Accessories Replacement Cover** 

# Polycarbonate Clear Replacement Cover for Diamond Shield 12 $\times$ 10 Inches







**Catalog Number** 

DSCC1210CVR

**UPC** 

785928911767.0

List Price

\$197.01

### **DESCRIPTION**


12H x 10W Inches Diamond Series Polycarbonate Clear Cover Only. Includes gasketed cover only. No hardware included.

#### **APPLICATION**

Suited for high-end and harsh industrial applications

#### **FEATURES**

- •Clear polycarbonate replacement cover for Diamond Shield Series
- Maximum visibility to raised panels and control boxes
- High temperature; flame retardant; non corrosive; environmental designs
- Results in an environmentally sealed; environmentally sound space
- High impact resistance

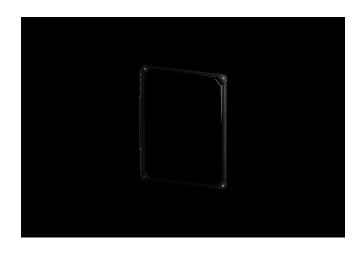



# **Accessories**

- Double insulated material no incidental electrical contact
- •Solid construction in a lightweight design
- •UV resistant

## **General Information**

| Color                                     | Clear  |
|---|--|
| Cover Type                                | Clear  |
| Material                                  | Polycarbonate                                  |
| Back Panel Screw Size                     |  |
| Back Panel Recommended<br>Torque          |  |
| Back Panel Screw Material                 |  |
| Cover Screw Size                          | #10-32 x 1-1/4                                 |
| Cover Screw Recommended Torque            | 20-24 in-lbs                                   |
| Cover Screw Material                      | 304 SS   |
| Mounting Foot Screw Size                  |  |
| Mounting Foot Screw<br>Recommended Torque |  |
| Installation Mounting Torque              |  |
| Gasket Material                           | Poured In Place (PIP)<br>Polyurethane Seamless |
| Country of Origin                         | USA  |
|   |  |

### **DIMENSIONS**

| Height (in) | 13.5  |
|-------------|-------|
| Width (in)  | 11.8  |
| Height (mm) | 341.9 |
| Width (mm)  | 300.5 |



# **Accessories**

### **STANDARDS**

| NEMA 10250; UL 50; UL 50e;<br>UL508A | cULus Listed File<br>#E64358 |
|--------------------------------------|------------------------------|
| CSA Std. C22.2                       | cULus Listed File<br>#E64358 |
| Туре                                 | 1; 3; 3S; 4; 4X; 12; 13      |
| IEC 60529; UL Listed<br>#E362920     | IP66                         |
| UL1741                               | UL Listed File #E333478      |
| Temperature Range °F                 | -76°F to +274°F              |
| Temperature Range °C                 | -60°C to +134°C              |
| Window Temperature Range °F          | -40°F to +248°F              |
| Window Temperature Range °C          | -40°C to +120°C              |
| Flammability Rating                  | UL94-5VA                     |
| NFPA No. 101 Flame Spread            | Class A(1)                   |
| Outdoor Exposure UL746c              | (f1) Rated                   |
| CE                                   | Certified                    |