

Enclosures **New Sentry Series**

## PVC Enclosure 6 x 6 x 4 Inches New Sentry Series with Opaque Lift Off Cover



**Catalog  
Number**

J664PVC

**UPC**

785928500503.0

List Price

**\$78.10**

### DESCRIPTION



6H x 6W x 4D Inches New Sentry Series PVC Enclosures are corrosion resistant, watertight PVC enclosures featuring simple screw down covers. Each enclosure is assembled with a PVC gasket and a screwdown lift-off cover and 4 captive brass cover screws.

### APPLICATION

Designed for general electrical; electronic applications; and any application that has associated environmental concerns

### FEATURES

- Corrosion resistant PVC material
- Memory retaining seamless PVC gasket
- Threaded inserts and captive brass cover screws
- Corrosion resistant PVC material

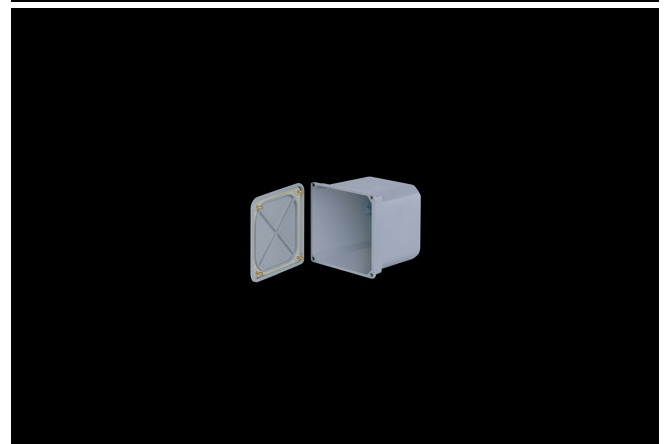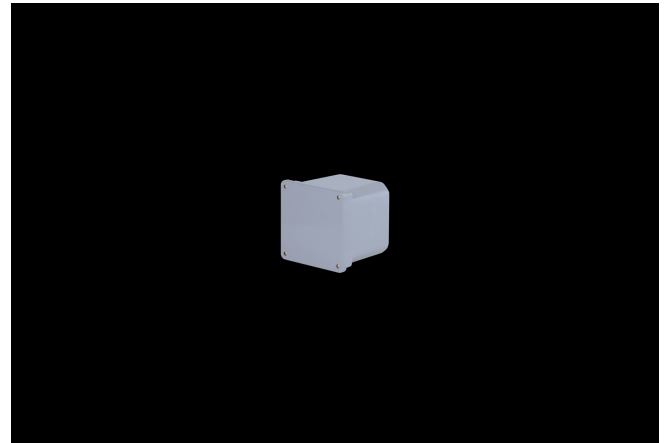

- Integral mounting feet available on some models

## General Information

---

|                                |               |
|--------------------------------|---------------|
| Color                          | Gray          |
| Cover Type                     | Opaque        |
| Material                       | PVC           |
| Back Panel Screw Size          |               |
| Cover Screw Size               | #8-32         |
| Cover Screw Recommended Torque | 16-20 in-lbs  |
| Cover Screw Material           | Brass         |
| Mounting Foot Screw Size       | 10-16 Hi-Lo   |
| Installation Mounting Torque   | 30 in-lbs Max |
| Metal Inserts                  | Brass         |
| Gasket Material                | PVC Seamless  |
| Country of Origin              | USA           |

## DIMENSIONS

---

|                   |       |
|-------------------|-------|
| Height (in)       | 6.9   |
| Width (in)        | 6.9   |
| Depth (in)        | 4.6   |
| Height (mm)       | 174.0 |
| Width (mm)        | 174.0 |
| Depth (mm)        | 116.1 |
| Usable Depth (in) | 4.0   |
| Usable Depth (mm) | 102.0 |

## STANDARDS

---

NEMA 10250; UL 50; UL 50e; UL Listed File #E190960  
UL508A

CSA Std. C22.2                      File 207025

Type                                      1; 2; 3; 4; 4X; 12; 13

Temperature Range °F              -4°F to +140°F

Temperature Range °C              -20°C to +60°C

Flammability Rating                UL94-V0

Outdoor Exposure UL746c        (f1) Rated