



Accessories Replacement Cover

Fiberglass Opaque Replacement Cover with Viewing Window for Diamond Shield 16 \times 14 Inches



Catalog Number DSW1614CVR

UPC

785928563850.0

List Price

\$507.47

DESCRIPTION


16H x 14W Inches Diamond Shield Series Fiberglass Enclosure Cover Only with Viewing Window. To be used as a replacement cover

APPLICATION

Suited for high-end and harsh industrial applications

FEATURES

- Flush bonded window replacement cover for Diamond Shield Series
- High temperature; flame retardant; non corrosive; environmental designs
- Results in an environmentally sealed; environmentally sound space
- High impact resistance
- Double insulated material no incidental electrical contact

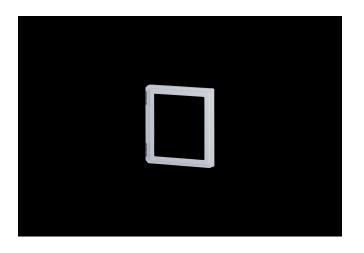





- •Solid construction in a lightweight design
- •UV resistant

General Information

| Color | Gray |
|---|--|
| Cover Type | Window |
| Material | Fiberglass |
| Back Panel Screw Size | |
| Back Panel Recommended Torque | |
| Back Panel Screw Material | |
| Cover Screw Size | #10-32 x 1-1/4 |
| Cover Screw Recommended Torque | 20-24 in-lbs |
| Cover Screw Material | 304 SS |
| Mounting Foot Screw Size | |
| Mounting Foot Screw Recommended Torque | |
| Installation Mounting Torque | |
| Gasket Material | Poured In Place (PIP) Polyurethane Seamless |
| Country of Origin | USA |
| | |

DIMENSIONS

| Height (in) | 17.6 |
|-------------|-------|
| Width (in) | 16.0 |
| Height (mm) | 446.8 |
| Width (mm) | 405.4 |



Accessories

STANDARDS

Temperature Range °F -76°F to +274°F

Temperature Range °C -60°C to +134°C

Window Temperature Range -26°F to +170°F

۲

Window Temperature Range $\,$ -32°C to +76°C

°C

Flammability Rating UL94-5VA

Outdoor Exposure UL746c (f1) Rated