

Enclosures **F Series**

## Fiberglass Enclosure 7 x 6 x 3 Inches F Series Slim with Opaque Lift Off Cover



**Catalog  
Number**

**F763**

**UPC**

**785928204906.0**

List Price

**\$125.12**

### DESCRIPTION


7H x 6W x 3D Inches Fiberglass F Series Slim Enclosure with Opaque Lift Off Cover is ideal for compact or portable control or simply as a small junction box. This stream lines series features unobstructed sidewalls, captive cover screws and a full range of sizes. The F Series features a small overhand cover, but also adds back panel mounting capabilities.

### APPLICATION

For use in many MRO and OEM applications

### FEATURES

- Memory retaining continuous polyurethane gasket
- Captive stainless steel cover screws

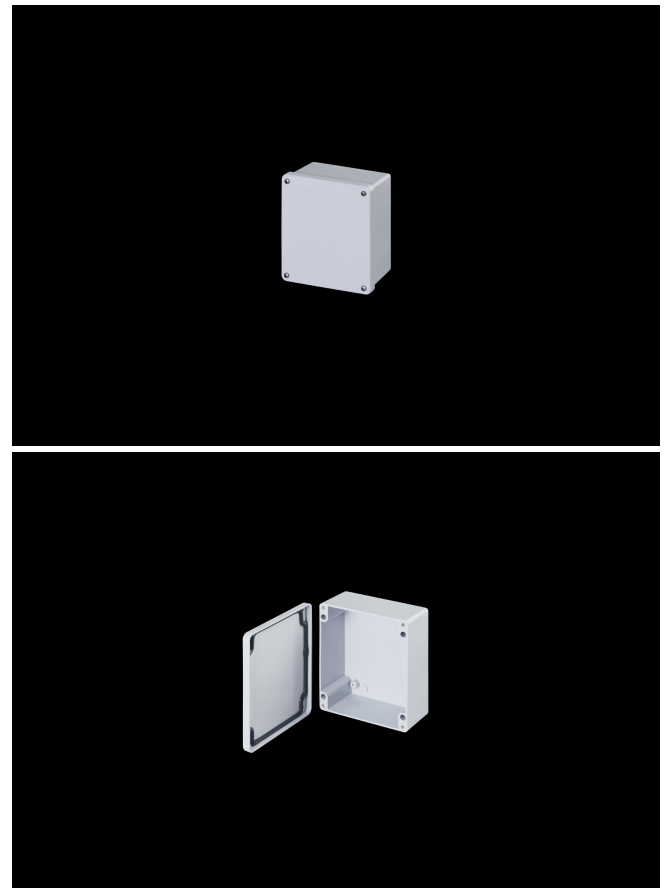

- Submersible; non corrosive; environmental design
- High Impact Resistance
- Manufactured with SolarGuard®, Stahlin's proprietary formulation of non-halogenated fiberglass, offering superior resistance to outdoor exposure, chemicals and flames.
- Back Panels Available for all sizes

## General Information

Color	Gray
Cover Type	Opaque
Material	Fiberglass
Cover Screw Size	#10-24 x 3/4
Cover Screw Recommended Torque	20-24 in-lbs
Cover Screw Material	304 SS
Installation Mounting Torque	45 in-lbs Max
Metal Inserts	Brass
Gasket Material	Poured In Place (PIP) Polyurethane Seamless
Country of Origin	USA

## DIMENSIONS

Height (in)	7.0
Width (in)	6.0
Depth (in)	3.0
Height (mm)	177.8
Width (mm)	152.4
Depth (mm)	76.2
Usable Depth (in)	2.5
Usable Depth (mm)	63.0

## STANDARDS

---

NEMA 10250; UL 50; UL 50e; cULus Listed File  
UL508A #E64358

CSA Std. C22.2 cULus Listed File  
#E64358

Type 1; 3R; 4; 4X; 6P; 12

IEC 60529; UL Listed IP66; IP67; IP68  
#E362920

UL1741 UL Listed File #E333478

Plenum Space UL2043 Compliant

Temperature Range °F -76°F to +274°F

Temperature Range °C -60°C to +134°C

Flammability Rating UL94-5VA

NFPA No. 101 Flame Spread Class A(1)

Outdoor Exposure UL746c (f1) Rated

CE Certified