


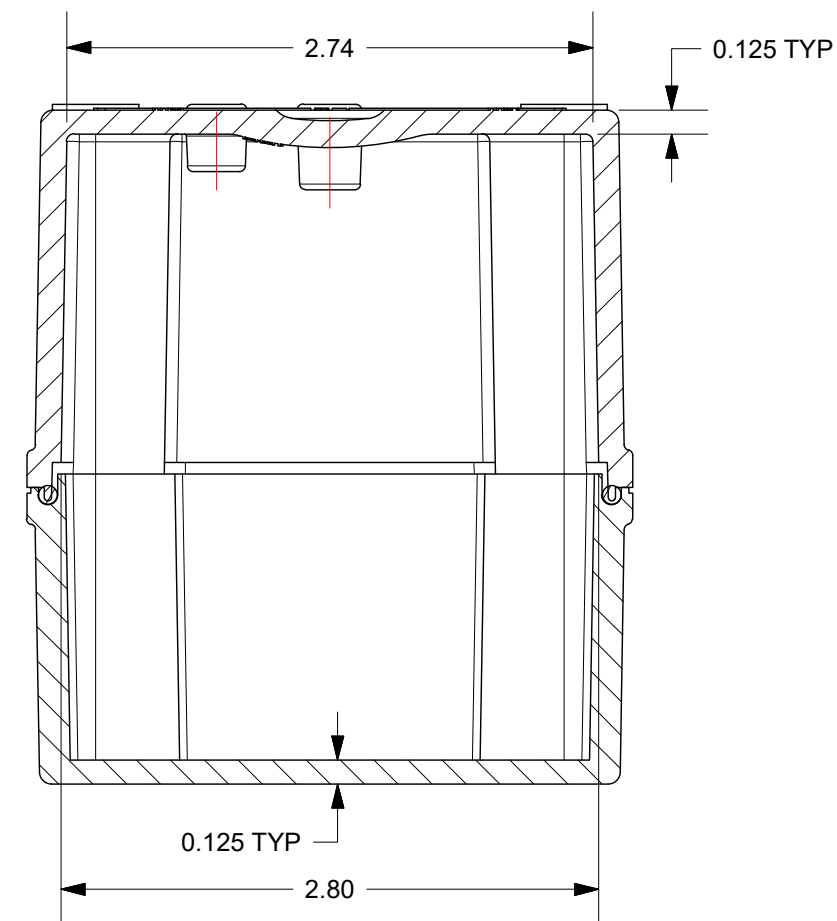


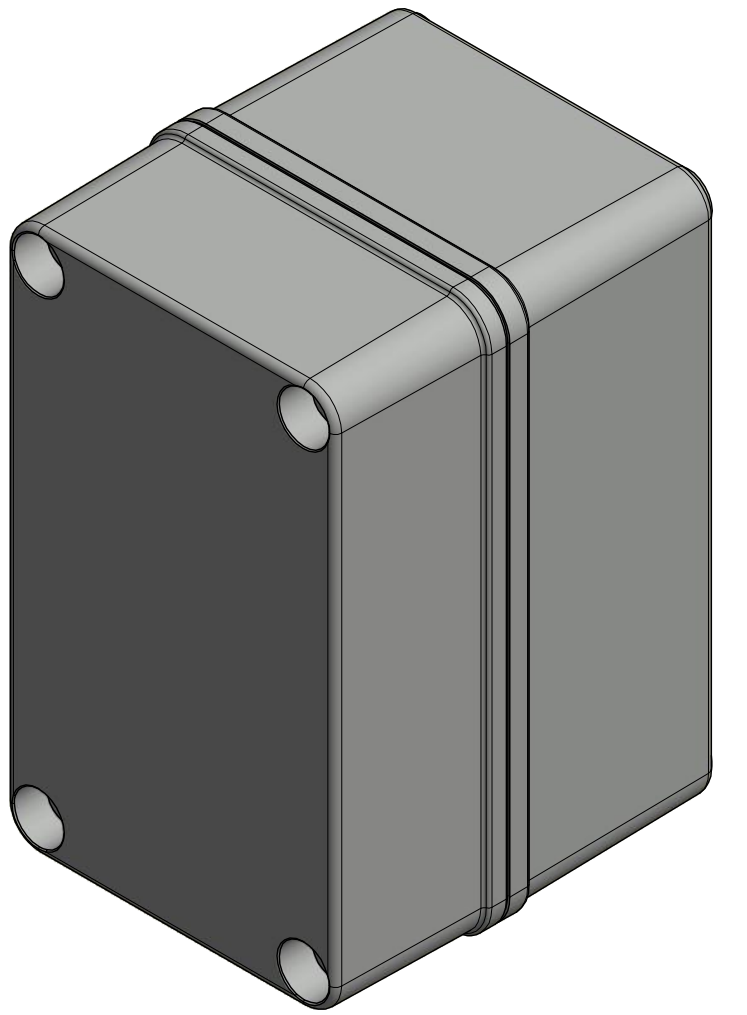

SECTION A-A

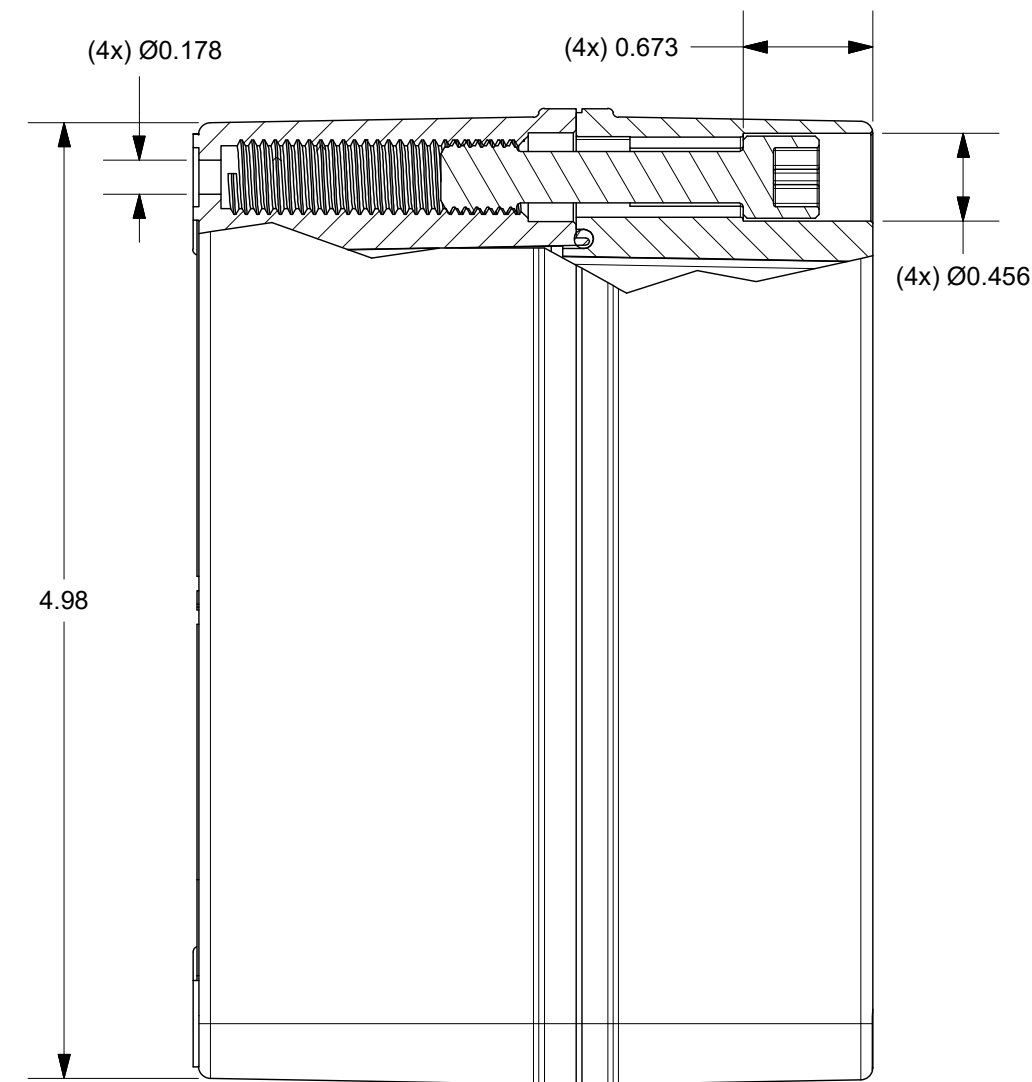


LEFT VIEW

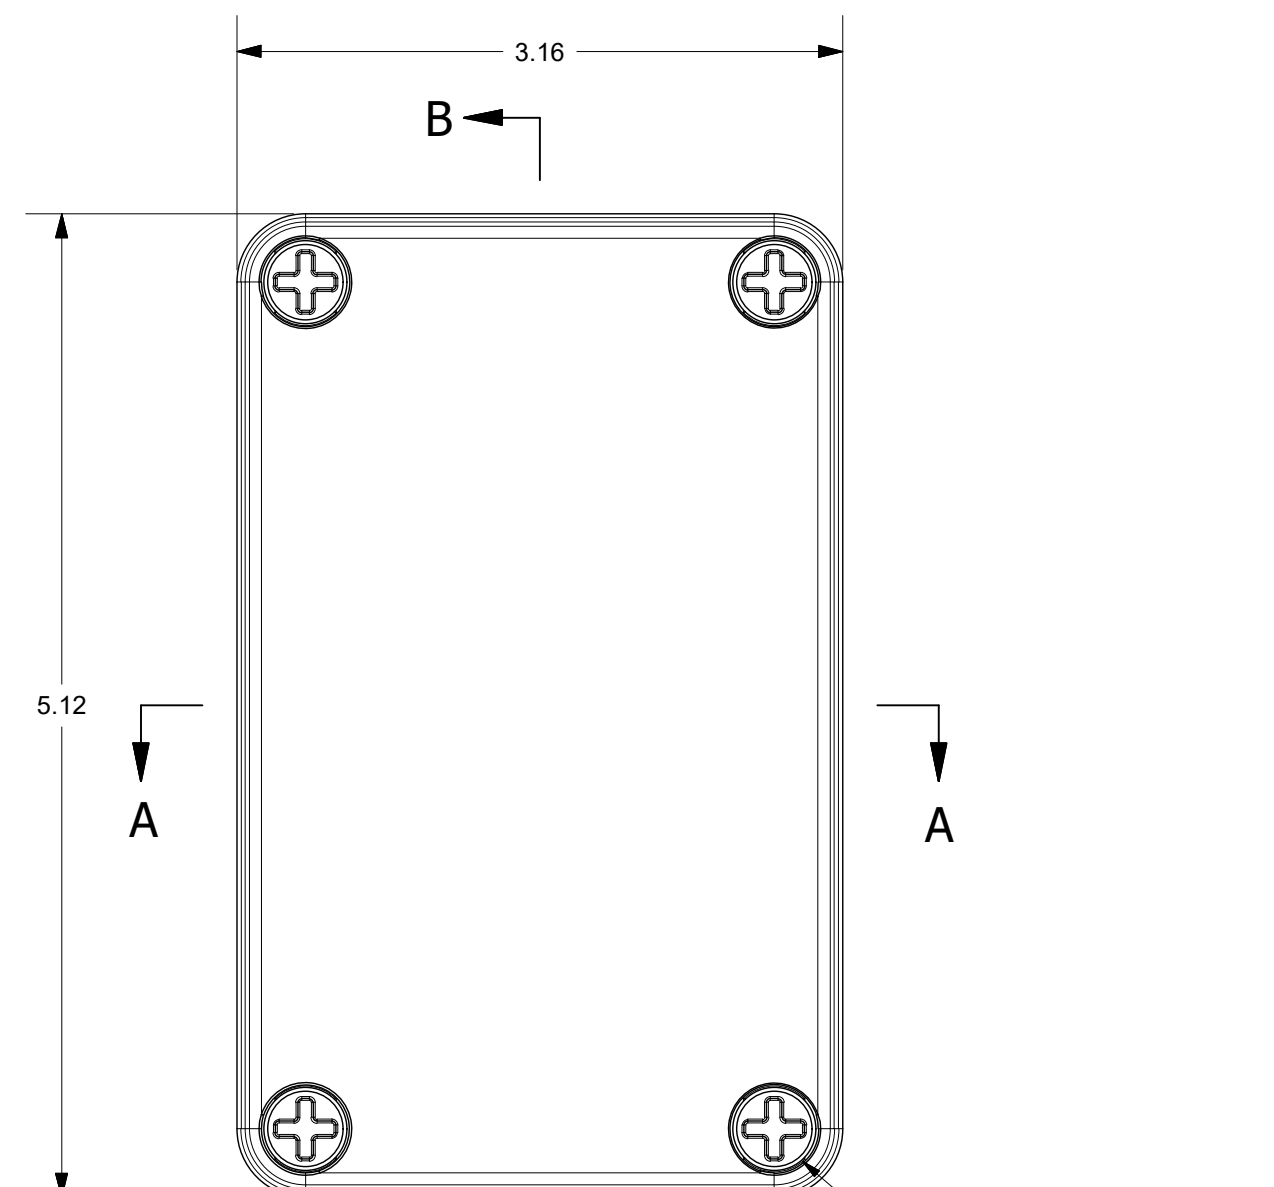


B 



FRONT VIEW

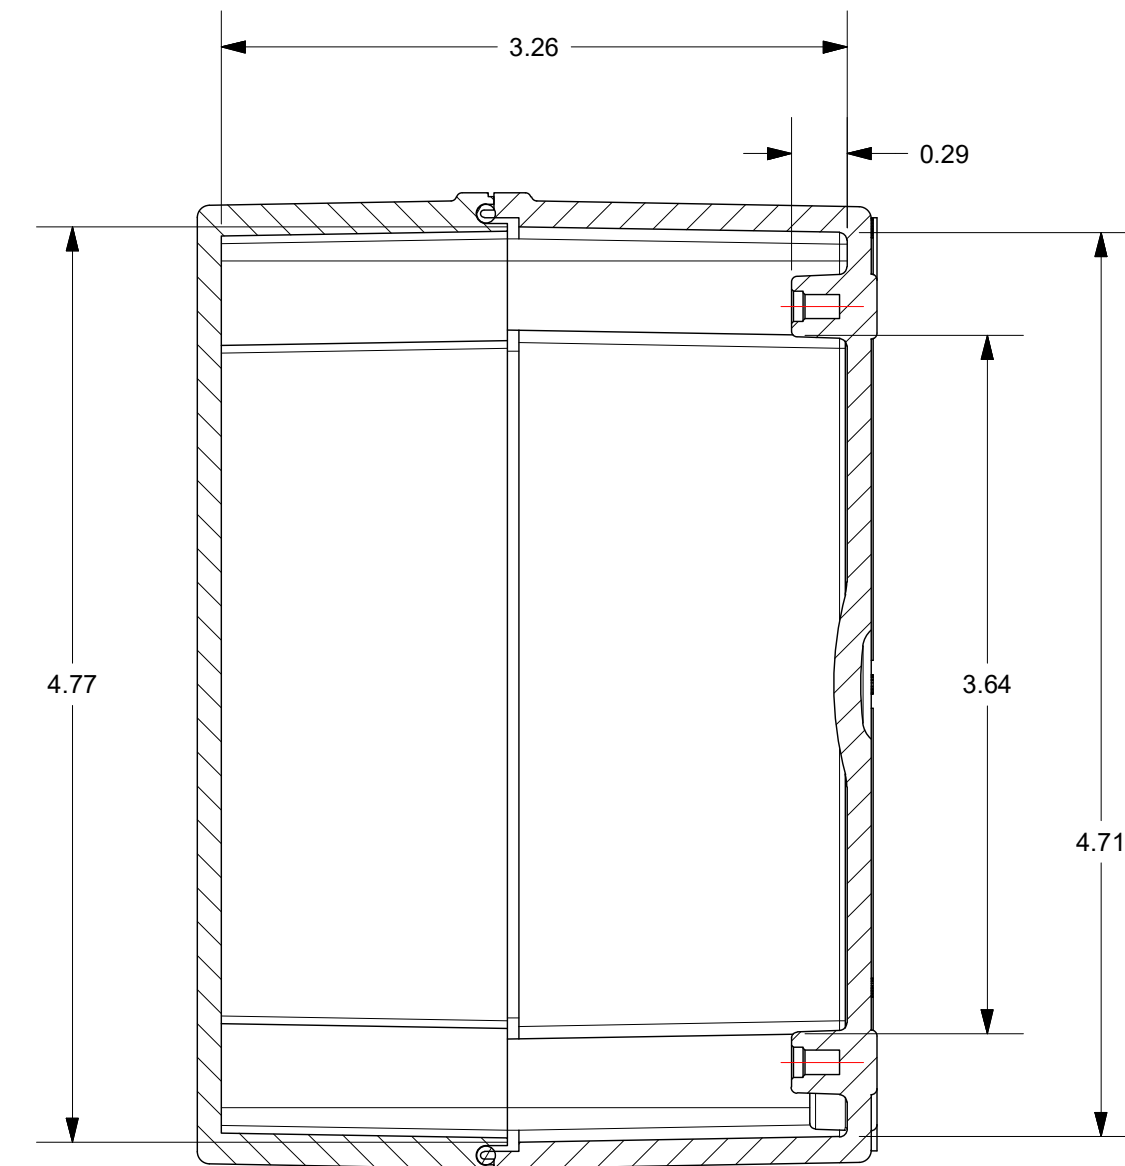

SECTION B-B

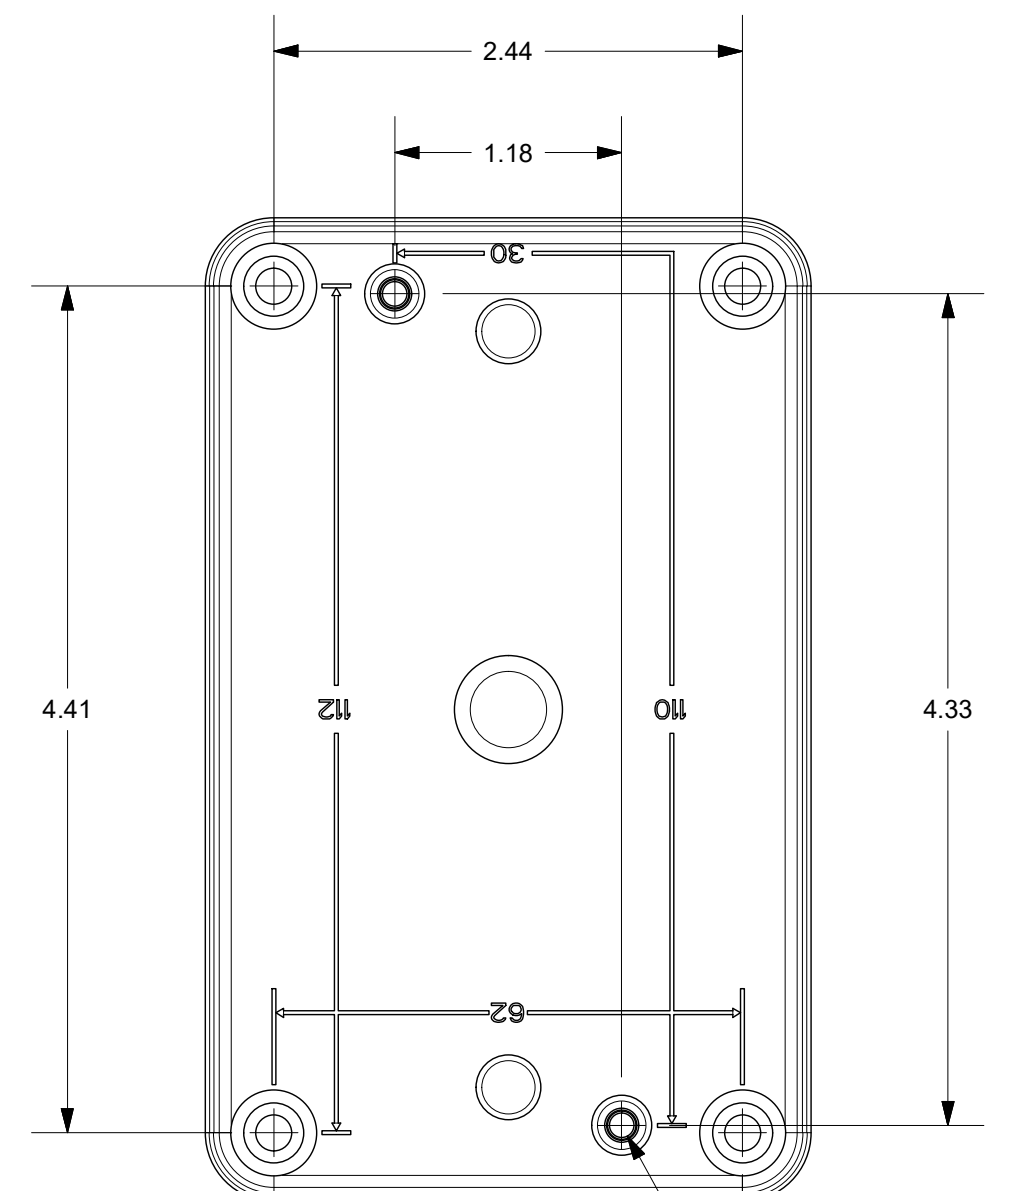

BACK VIEW

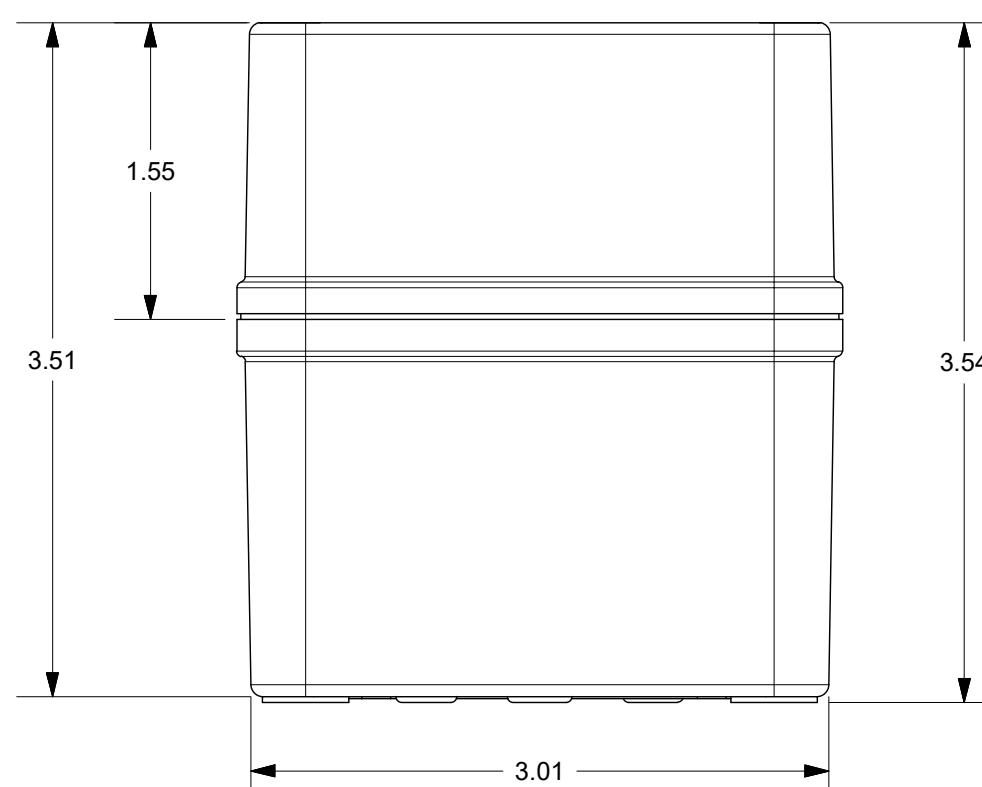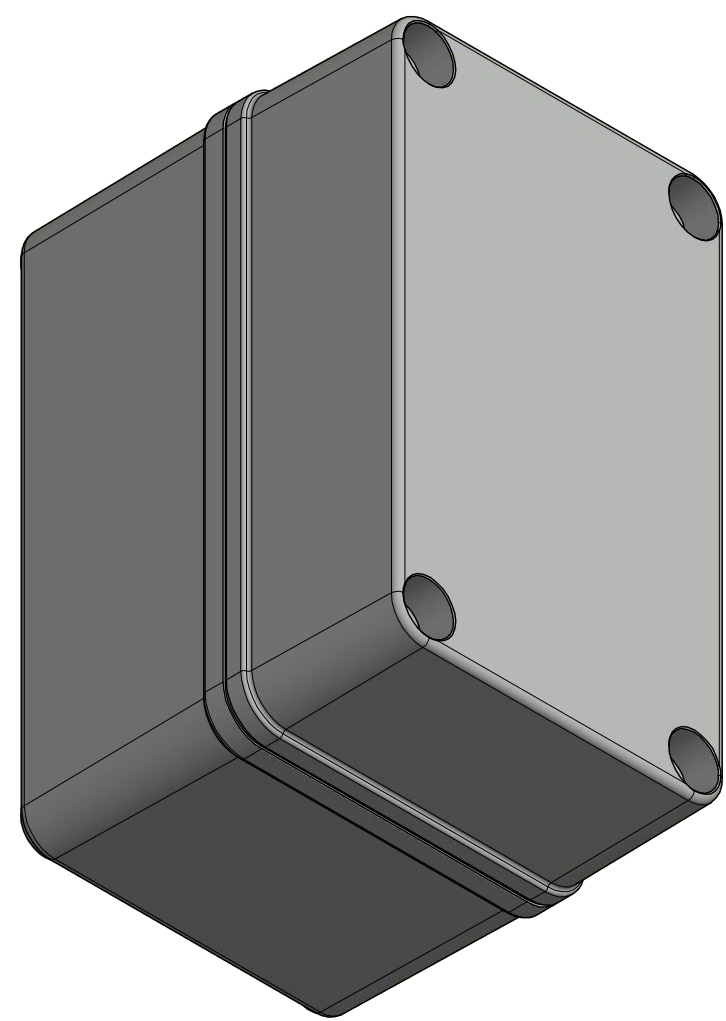

BOTTOM VIEW

THIS DRAWING IS THE SOLE AND EXCLUSIVE
PROPERTY OF ROBROY ENCLOSURES.
NO PART OF THIS DRAWING MAY BE
REPRODUCED, DISTRIBUTED, OR PUBLICALLY
DISPLAYED IN ANY FORM OR BY ANY MEANS
WITHOUT THE EXPRESS WRITTEN
PERMISSION OF ROBROY ENCLOSURES.
ALL RIGHTS RESERVED
UNDER THE COPYRIGHT LAWS.
COPYRIGHT © 2018 ROBROY ENCLOSURES

SPECIAL REQUIREMENTS

END USER NOTES:

1. TORQUE COVER SCREWS TO 16 IN.-LBS. TO MAINTAIN RATINGS
2. OPTIONAL MOUNTING FEET - SOLD SEPARATELY (CFMTGFKIT)
3. RECOMMEND #10-24 x 1" - IF MOUNTING BOX THROUGH MOUNTING WELLS

NEMA 250: TYPE 1, 3R, 4X, 6P, 12 IEC 60529: IP66, IP68 COLOR: N/A COLOR STANDARD: PANTONE 7541C				STANDARD P/N: CFCPC533 CUSTOMER DWG: N/A		ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOLERANCES UNLESS SPECIFIED		XX .XXX +0.03 +0.010	
MATERIAL: POLYCARBONATE						 STAHLIN www.stahlin.com		Robroy Enclosures 500 Maple Street Belding, Michigan 48809 Phone: 616-794-0700 Fax: 616-749-3378			
REVISION HISTORY											
REV	DESCRIPTION			DATE	ENG	DRAWN BY DATE AA 7/10/18 SCALE DO NOT SCALE		CUSTOMER		DWG CFCPC533	
-	-			-	-						
-	-			-	-						
-	-			-	-						
-	-			-	-						
PART NUMBER						FEFCPC533					

Robroy Enclosures
500 Maple Street
Lansing, Michigan 48809
Phone: 616-794-0700
Fax: 616-749-3378