


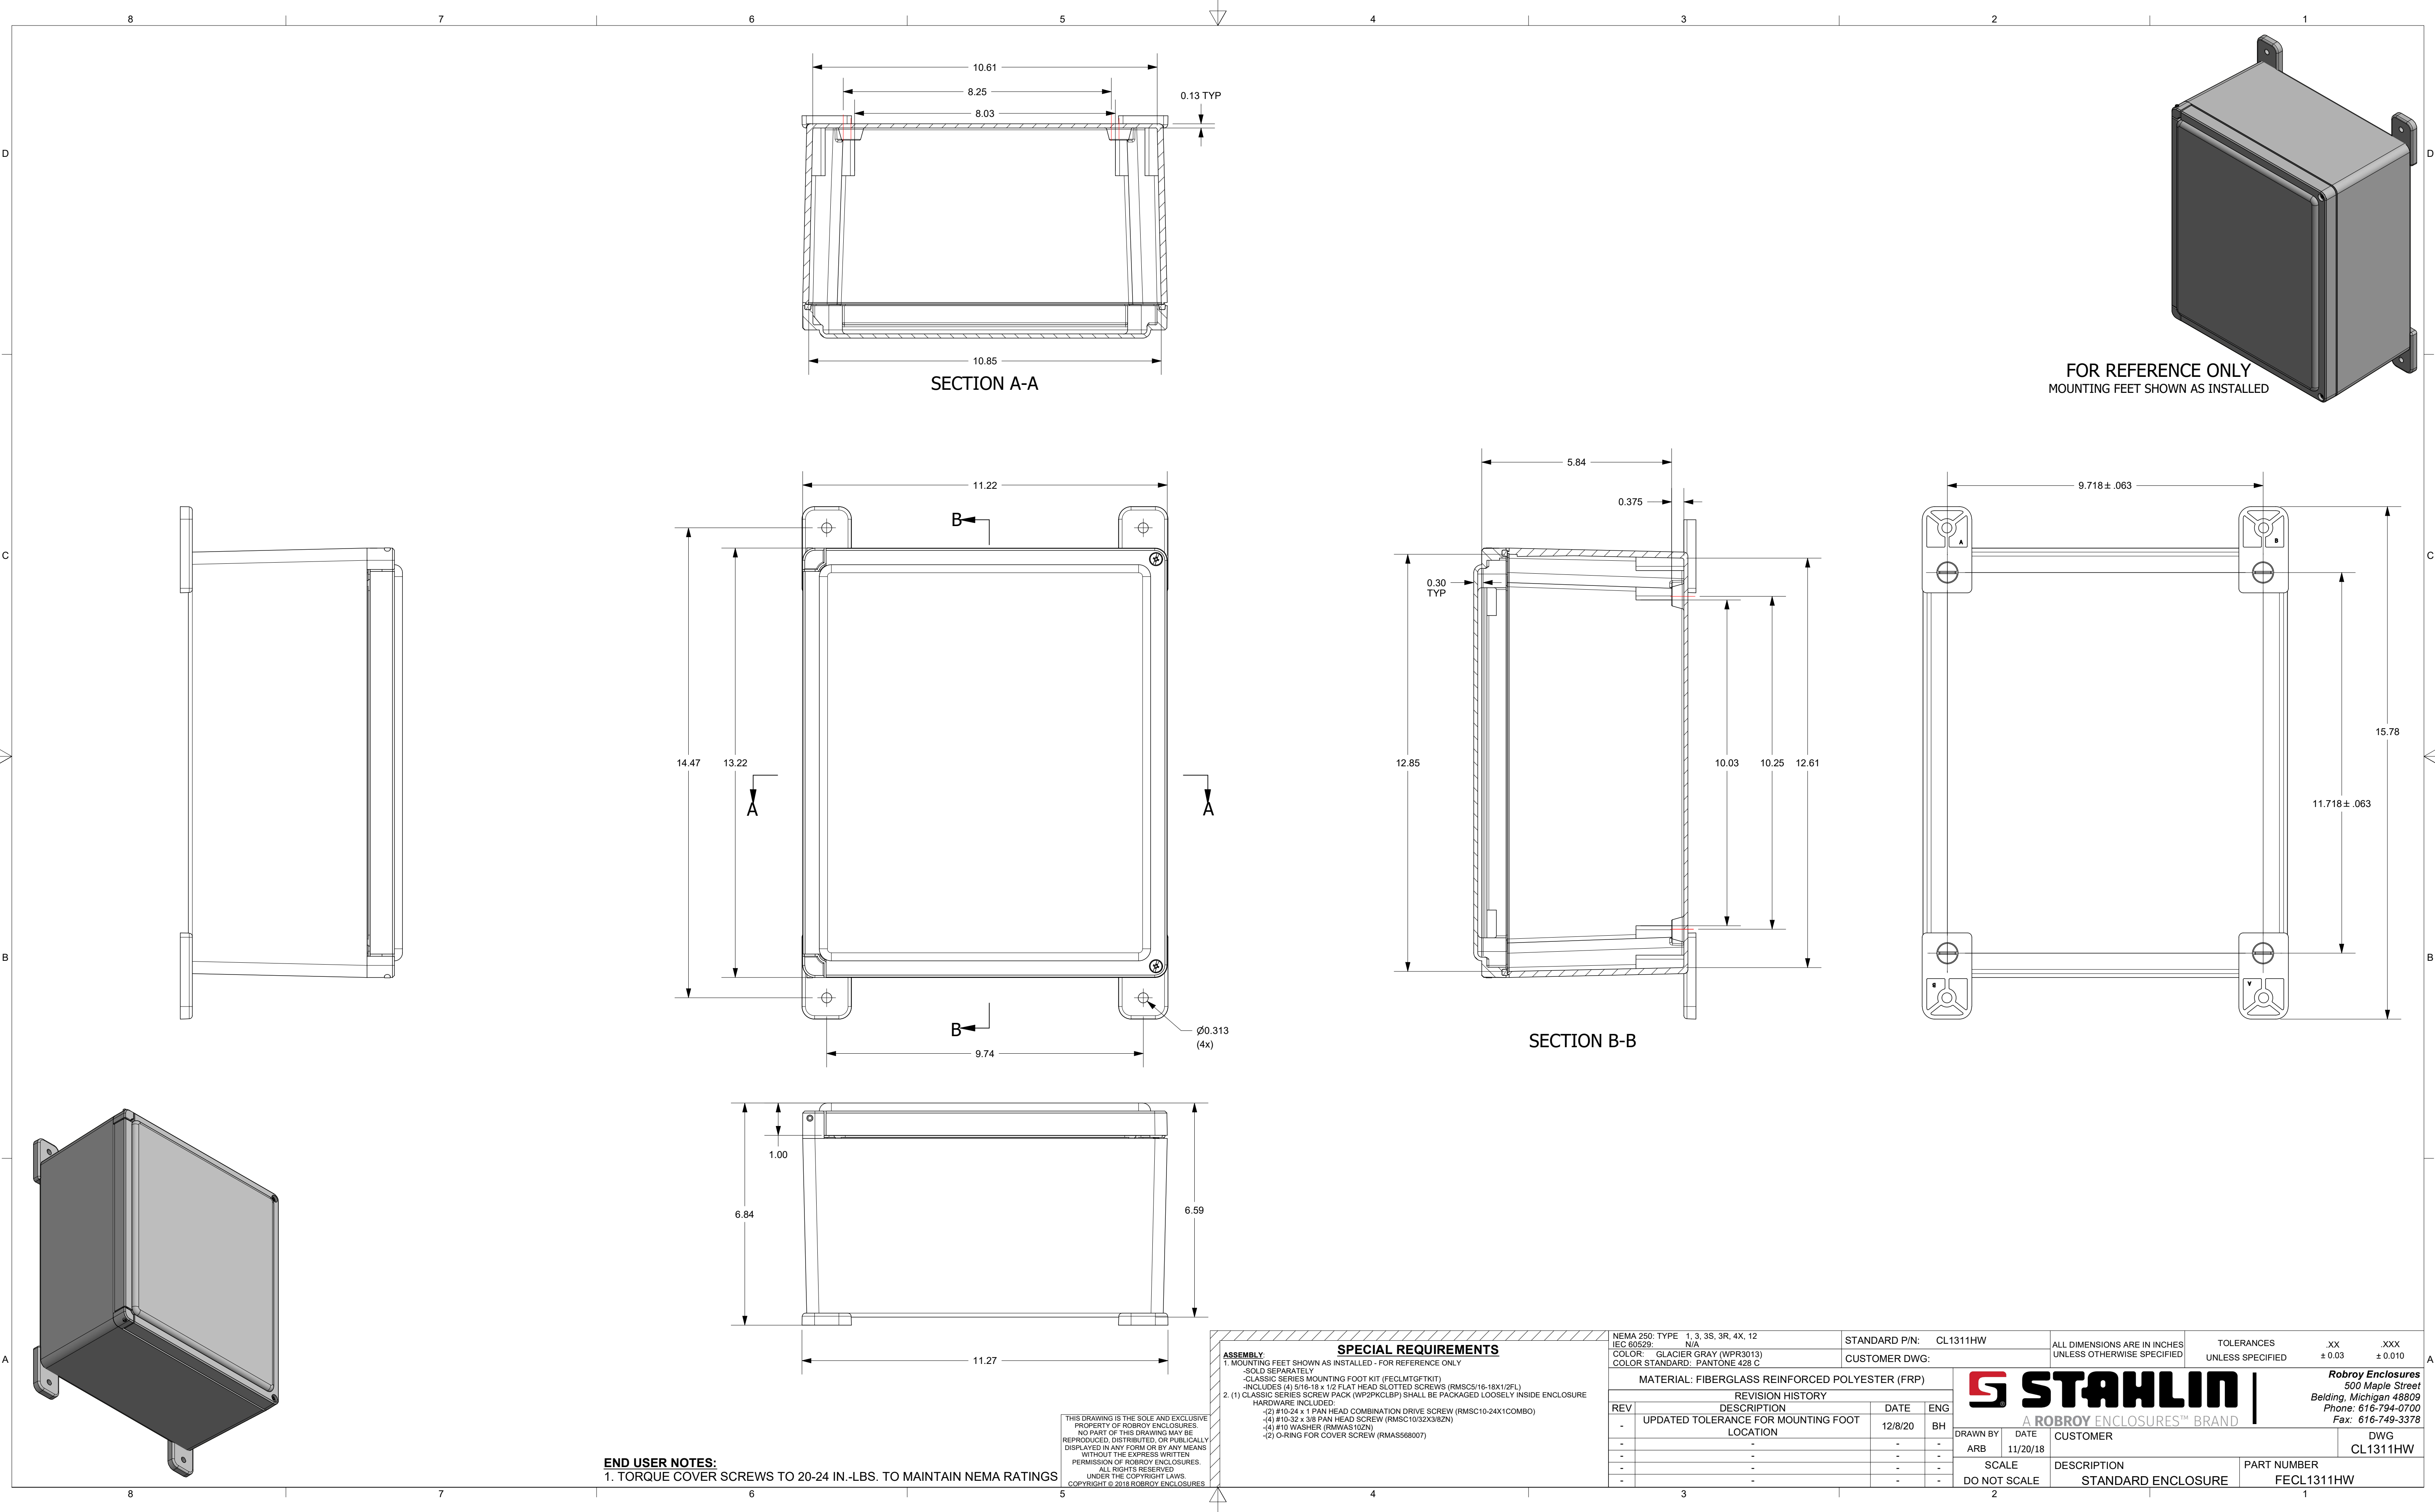

- ASSEMBLY:**
- 1. MOUNTING FEET SHOWN AS INSTALLED - FOR REFERENCE ONLY
 - 2. (1) CLASSIC SERIES MOUNTING FOOT KIT (FECLMTGFTKIT) - SOLD SEPARATELY
 - 3. (1) CLASSIC SERIES SCREW PACK (WP2PKCLBP) SHALL BE PACKAGED LOOSELY INSIDE ENCLOSURE
- SPECIAL REQUIREMENTS**
- (2) #10-24 x 1 PAN HEAD COMBINATION DRIVE SCREW (RMSC10-24X1COMBO)
 - (4) #10-32 x 3/8 PAN HEAD SCREW (RMSC10/32X3/8ZN)
 - (4) #10 WASHER (RMWAS10ZN)
 - (2) O-RING FOR COVER SCREW (RMA568007)

NEMA 250: TYPE 1, 3, 3S, 3R, 4X, 12 IEC 60529: 1, N/A			STANDARD P/N: CL1311HW		ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOLERANCES UNLESS SPECIFIED		.XX ± 0.03	.XXX ± 0.010
COLOR: GLACIER GRAY (WPR3013) COLOR STANDARD: PANTONE 428 C			CUSTOMER DWG:							
MATERIAL: FIBERGLASS REINFORCED POLYESTER (FRP)										
REVISION HISTORY				 STAHLIN A ROBROY ENCLOSURES™ BRAND						
REV	DESCRIPTION		DATE							
-	UPDATED TOLERANCE FOR MOUNTING FOOT LOCATION		12/8/20	BH	DRAWN BY		DATE	CUSTOMER		DWG
-	-		-	-	ARB		11/20/18			CL1311HW
-	-		-	-	SCALE		DESCRIPTION		PART NUMBER	
-	-		-	-	DO NOT SCALE		STANDARD ENCLOSURE		FECL1311HW	
3			2		1					