


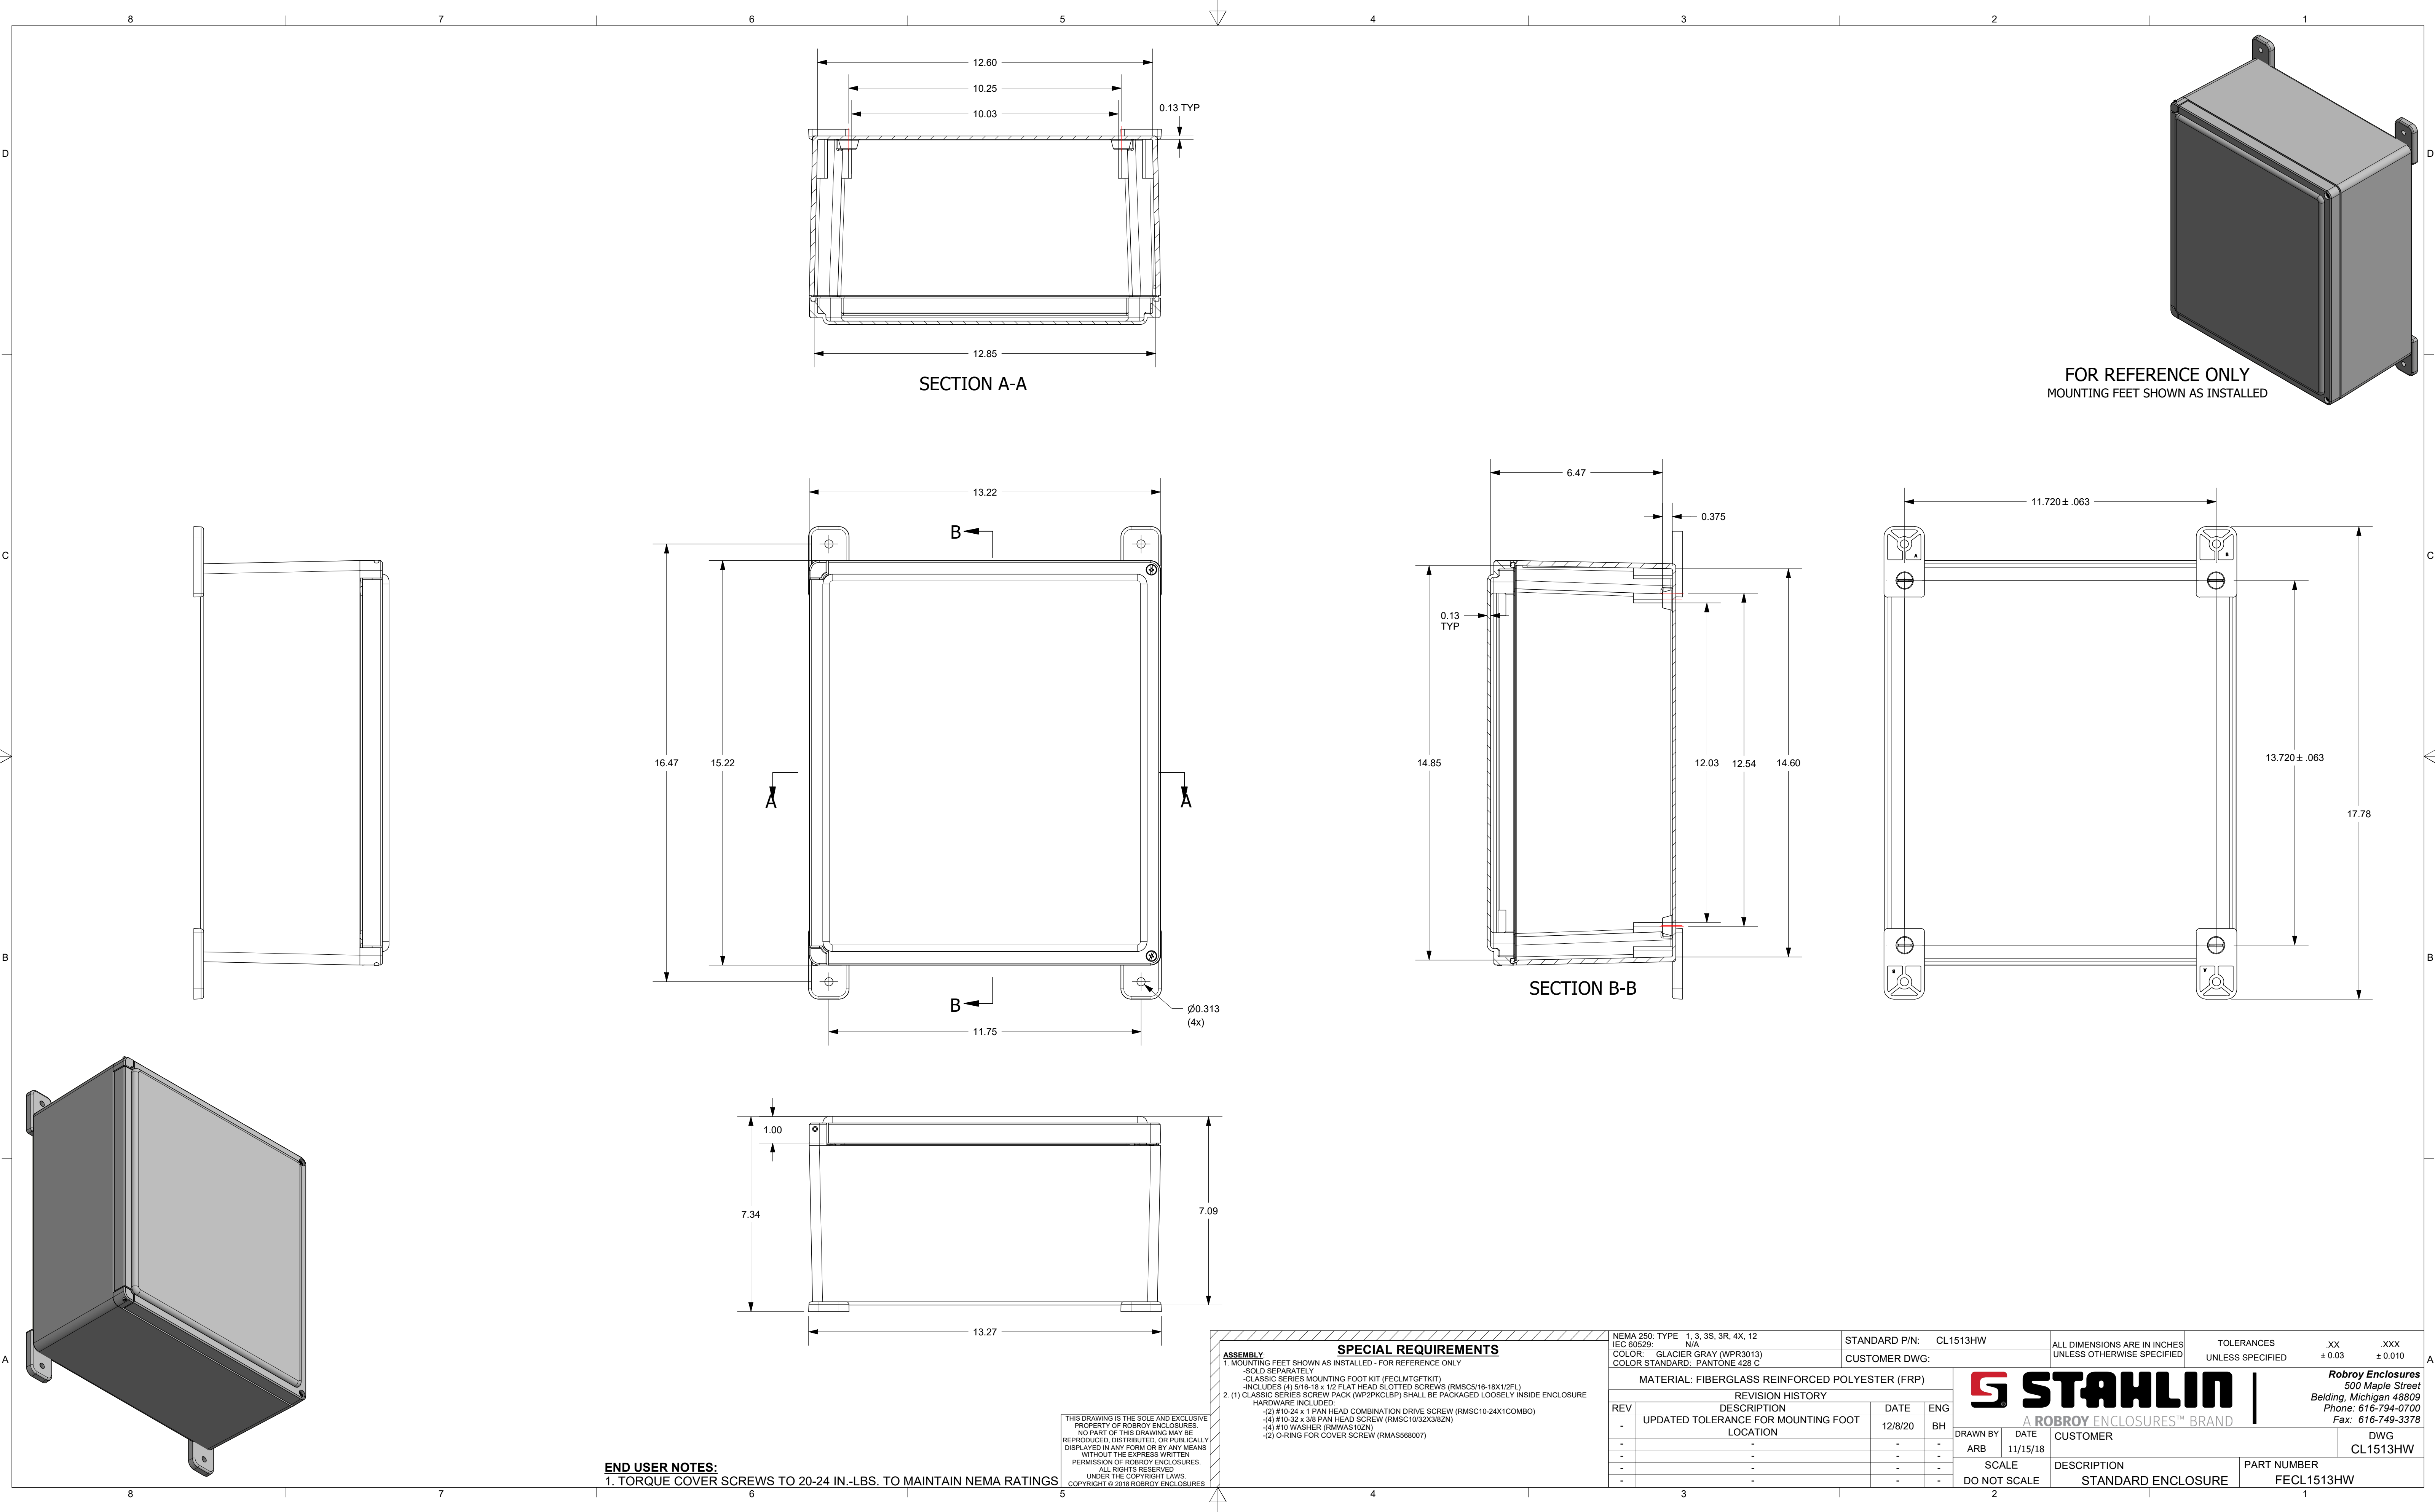

FOR REFERENCE ONLY
MOUNTING FEET SHOWN AS INSTALLED

END USER NOTES:
1. TORQUE COVER SCREWS TO 20-24 IN.-LBS. TO MAINTAIN NEMA RATINGS

THIS DRAWING IS THE SOLE AND EXCLUSIVE
PROPERTY OF ROBROY ENCLOSURES.
NO PART OF THIS DRAWING MAY BE
REPRODUCED, DISTRIBUTED, OR PUBLICALLY
DISPLAYED IN ANY FORM OR BY ANY MEANS
WITHOUT THE EXPRESS WRITTEN
PERMISSION OF ROBROY ENCLOSURES.
ALL RIGHTS RESERVED.
UNDER THE COPYRIGHT LAWS.
COPYRIGHT © 2018 ROBROY ENCLOSURES

ASSEMBLY:
1. MOUNTING FEET SHOWN AS INSTALLED - FOR REFERENCE ONLY
- SOLD SEPARATELY
- CLASSIC SERIES MOUNTING FOOT KIT (FECLMTGFTKIT)
- INCLUDES (4) 5/16-18 x 1/2 FLAT HEAD SLOTTED SCREWS (RMSC5/16-18X1/2FL)
2. (1) CLASSIC SERIES SCREW PACK (WP2PKCLBP) SHALL BE PACKAGED LOOSELY INSIDE ENCLOSURE
HARDWARE INCLUDED:
- (2) #10-24 x 1 PAN HEAD COMBINATION DRIVE SCREW (RMSC10-24X1COMBO)
- (4) #10-32 x 3/8 PAN HEAD SCREW (RMSC10/32X3/8ZN)
- (4) #10 WASHER (RMWAS10ZN)
- (2) O-RING FOR COVER SCREW (RMA568007)

SPECIAL REQUIREMENTS

NEMA 250: TYPE 1, 3, 3S, 3R, 4X, 12 IEC 60529: N/A			STANDARD P/N: CL1513HW		ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOLERANCES UNLESS SPECIFIED		.XX ± 0.03	.XXX ± 0.010
COLOR: GLACIER GRAY (WPR3013) COLOR STANDARD: PANTONE 428 C			CUSTOMER DWG:							
MATERIAL: FIBERGLASS REINFORCED POLYESTER (FRP)					 STAHLIN A ROBROY ENCLOSURES™ BRAND		Robroy Enclosures 500 Maple Street Belding, Michigan 48809 Phone: 616-794-0700 Fax: 616-749-3378 DWG CL1513HW			
REVISION HISTORY										
REV	DESCRIPTION	DATE	ENG							
-	UPDATED TOLERANCE FOR MOUNTING FOOT LOCATION	12/8/20	BH							
-	-	-	-							
-	-	-	-							
-	-	-	-							
DRAWN BY					DATE	CUSTOMER				
ARB					11/15/18			CL1513HW		
SCALE					DESCRIPTION		PART NUMBER			
DO NOT SCALE					STANDARD ENCLOSURE		FECL1513HW			

STAHLIN
A ROBROY ENCLOSURES™ BRAND
Robroy Enclosures
500 Maple Street
Belding, Michigan 48809
Phone: 616-794-0700
Fax: 616-749-3378