


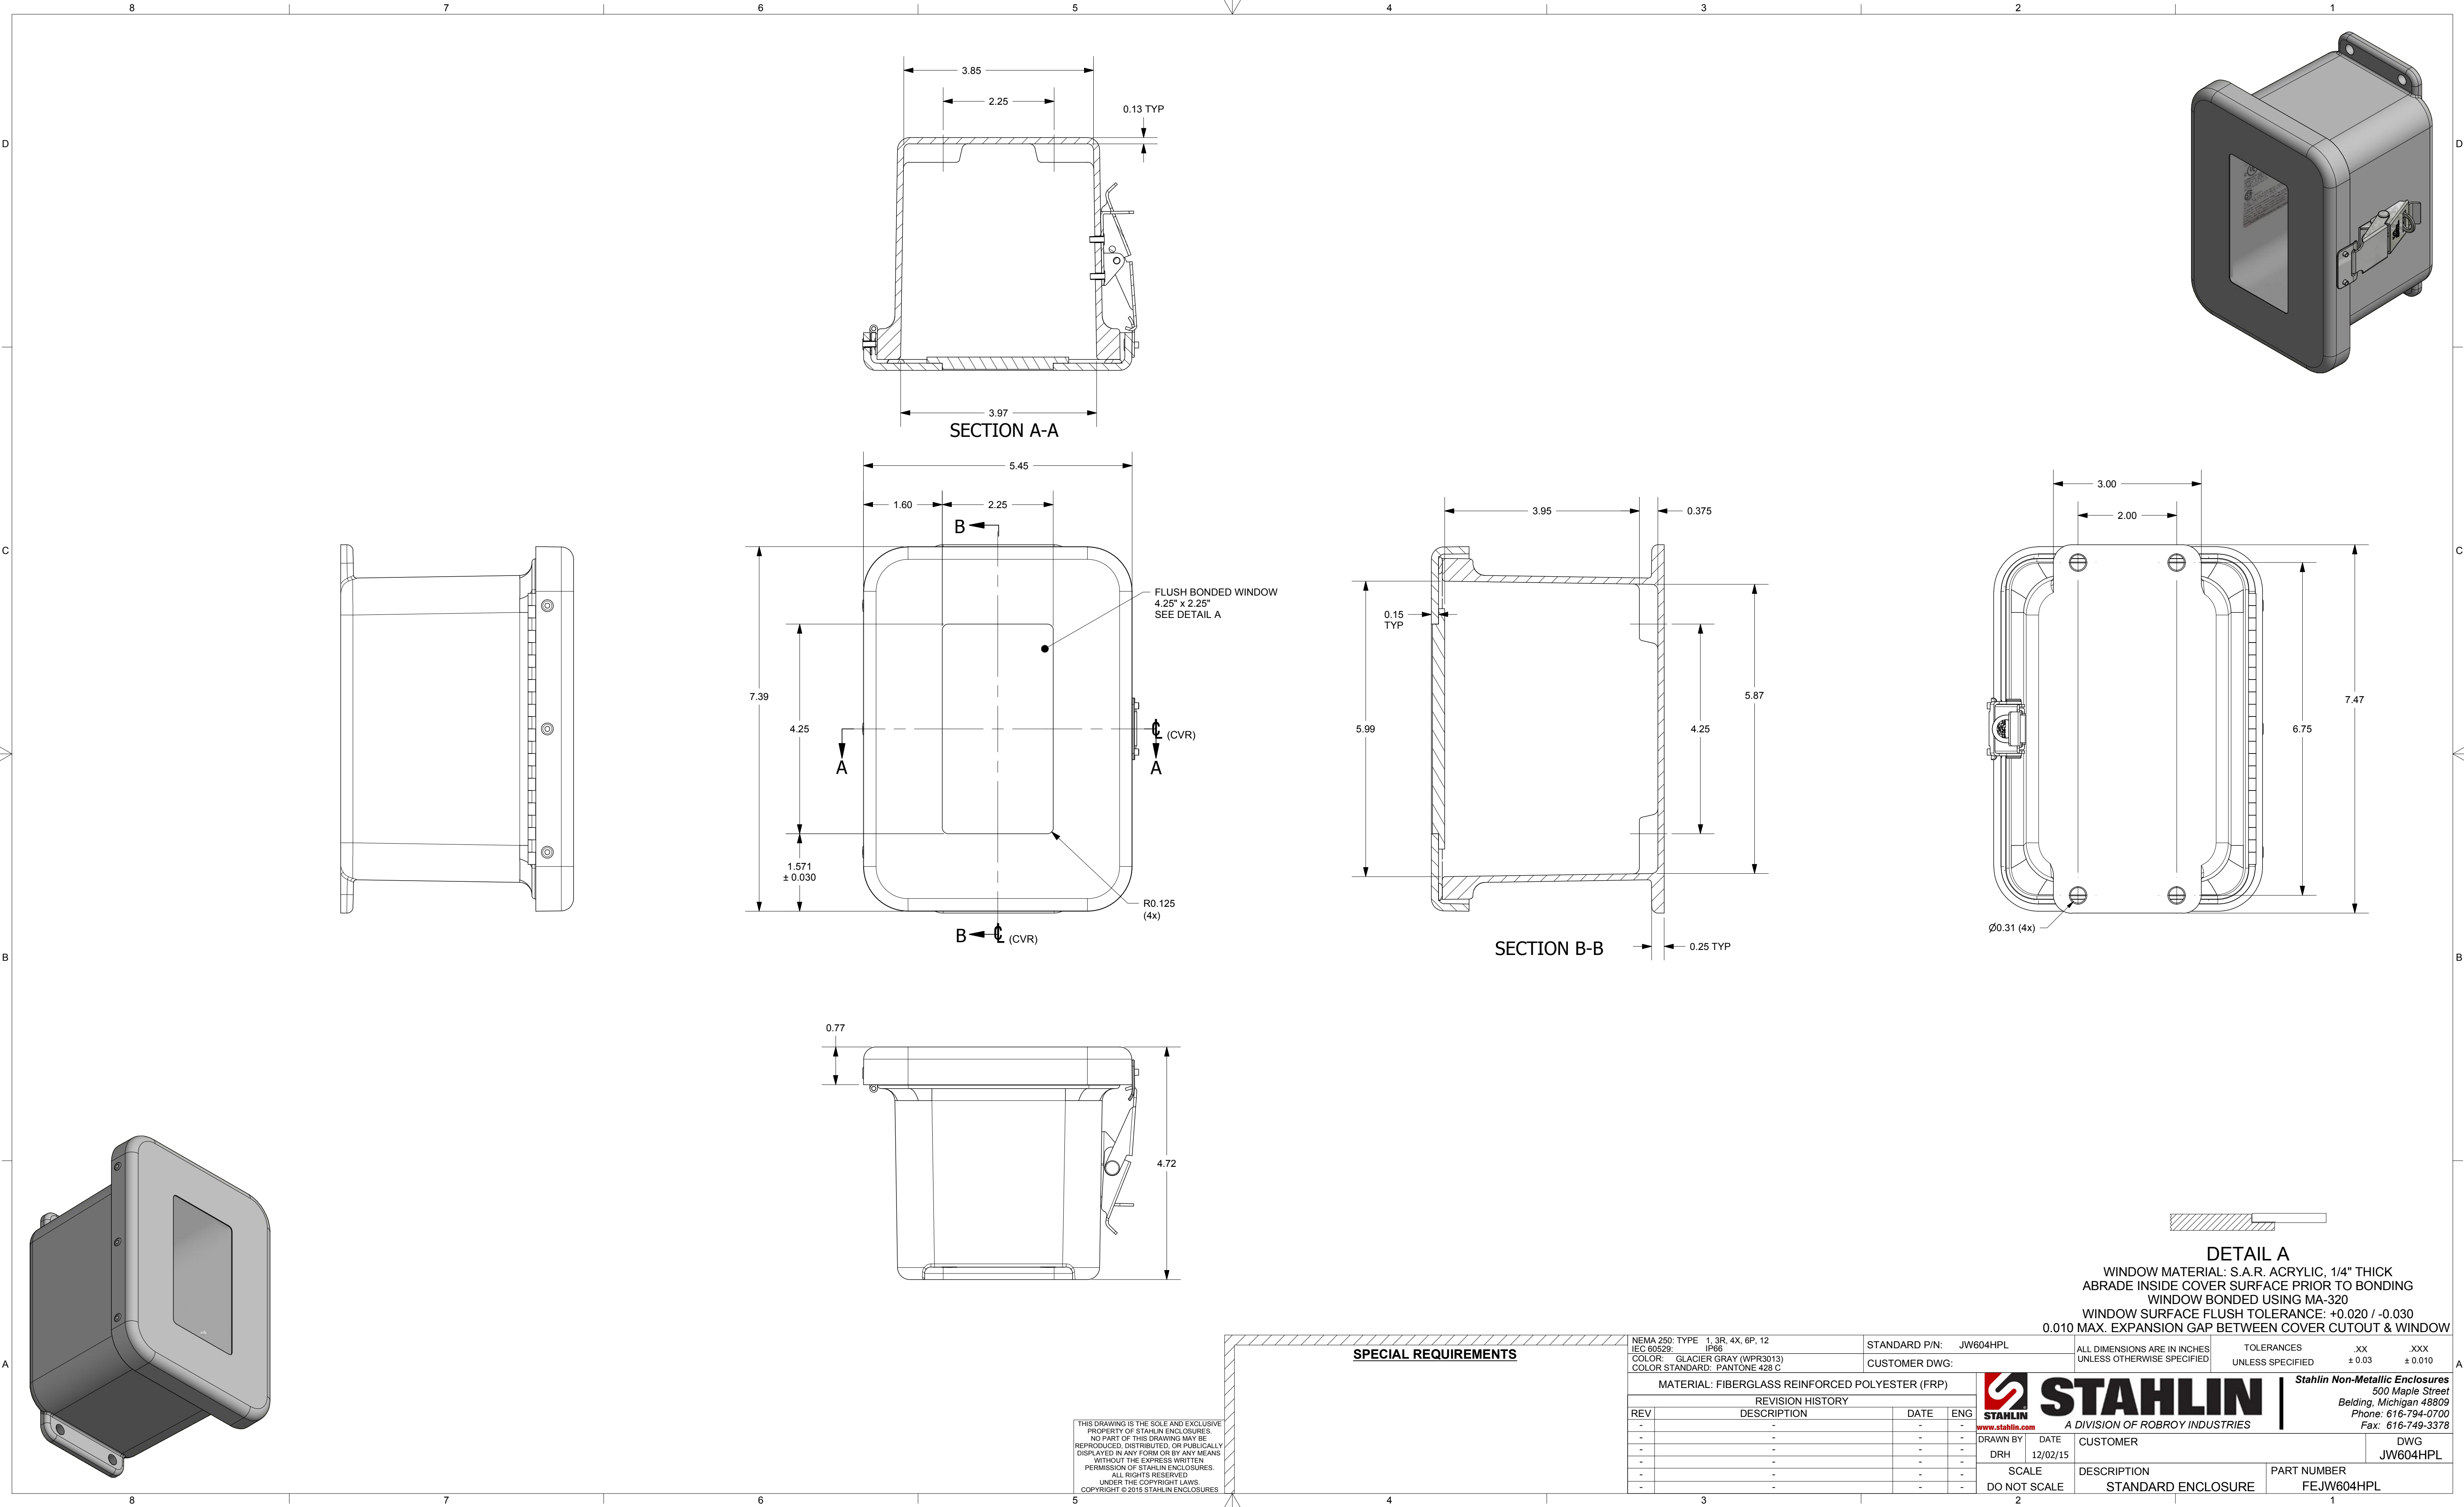

SECTION A-A

SECTION B-B

DETAIL A

WINDOW MATERIAL: S.A.R. ACRYLIC, 1/4" THICK
ABRADE INSIDE COVER SURFACE PRIOR TO BONDING
WINDOW BONDED USING MA-320
WINDOW SURFACE FLUSH TOLERANCE: +0.020 / -0.030
0.010 MAX. EXPANSION GAP BETWEEN COVER CUTOUT & WINDOW

SPECIAL REQUIREMENTS

NEMA 250: TYPE 1, 3R, 4X, 6P, 12 IEC 60529: IP66 COLOR: GLACIER GRAY (WPR3013) COLOR STANDARD: PANTONE 428 C		STANDARD P/N: JW604HPL	ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOLERANCES UNLESS SPECIFIED	.XX ± 0.03	.XXX ± 0.010
MATERIAL: FIBERGLASS REINFORCED POLYESTER (FRP)		CUSTOMER DWG:	STAHLIN A DIVISION OF ROBROY INDUSTRIES Stahlin Non-Metallic Enclosures 500 Maple Street Belding, Michigan 48809 Phone: 616-794-0700 Fax: 616-749-3378				
REVISION HISTORY							
REV	DESCRIPTION	DATE	ENG				
-	-	-	-				
-	-	-	-				
-	-	-	-				
-	-	-	-				
-	-	-	-				
-	-	-	-				
		DRH	DATE	CUSTOMER		DWG	
		SCALE	DESCRIPTION	PART NUMBER		JW604HPL	
		DO NOT SCALE	STANDARD ENCLOSURE	FEJW604HPL			

THIS DRAWING IS THE SOLE AND EXCLUSIVE
PROPERTY OF STAHLIN ENCLOSURES.
NO PART OF THIS DRAWING MAY BE
REPRODUCED, DISTRIBUTED, OR PUBLICALLY
DISPLAYED IN ANY FORM OR BY ANY MEANS
WITHOUT THE EXPRESS WRITTEN
PERMISSION OF STAHLIN ENCLOSURES.
ALL RIGHTS RESERVED.
UNDER THE COPYRIGHT LAWS.
COPYRIGHT © 2015 STAHLIN ENCLOSURES

**STAHLIN**
A DIVISION OF ROBROY INDUSTRIES

Stahlin Non-Metallic Enclosures
500 Maple Street
Belding, Michigan 48809
Phone: 616-794-0700
Fax: 616-749-3378

