


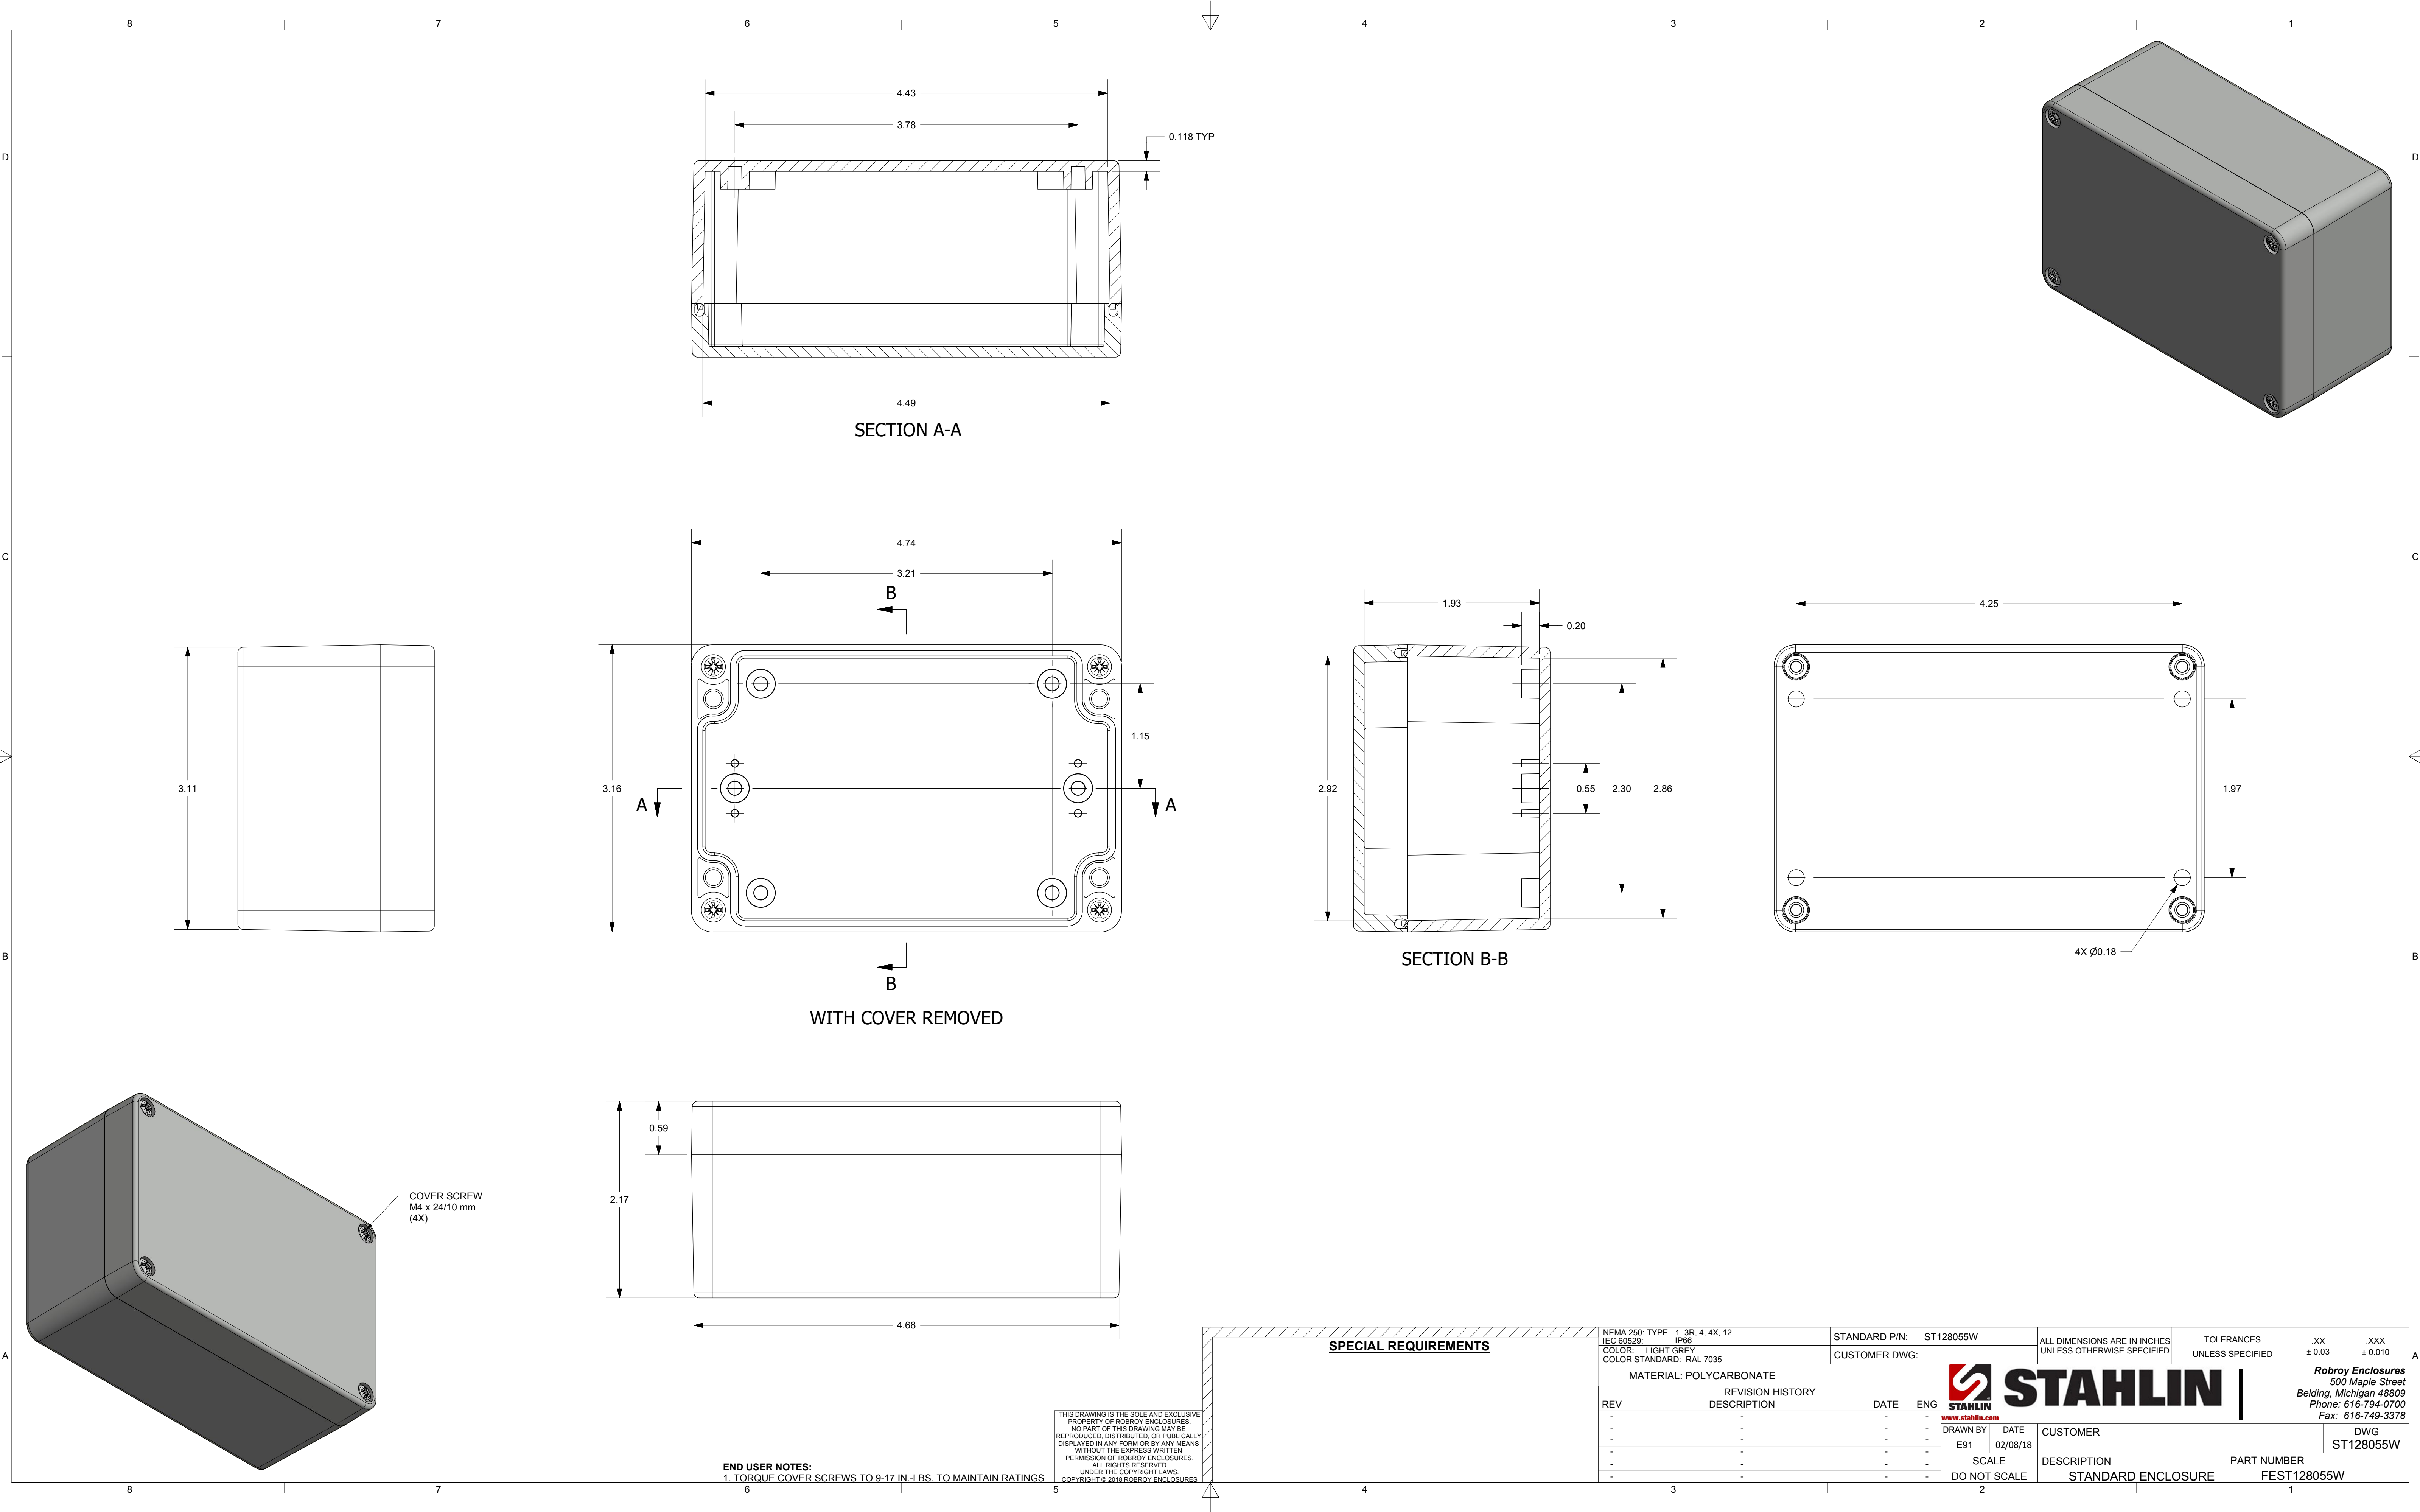

END USER NOTES:
1. TORQUE COVER SCREWS TO 9-17 IN.-LBS. TO MAINTAIN RATINGS.

THIS DRAWING IS THE SOLE AND EXCLUSIVE PROPERTY OF ROBROY ENCLOSURES. NO PART OF THIS DRAWING MAY BE REPRODUCED, DISTRIBUTED, OR PUBLICALLY DISPLAYED IN ANY FORM OR BY ANY MEANS WITHOUT THE EXPRESS WRITTEN PERMISSION OF ROBROY ENCLOSURES. ALL RIGHTS RESERVED. UNDER THE COPYRIGHT LAWS. COPYRIGHT © 2018 ROBROY ENCLOSURES

SPECIAL REQUIREMENTS

NEMA 250: TYPE 1, 3R, 4, 4X, 12 IEC 60529: IP66 COLOR: LIGHT GREY COLOR STANDARD: RAL 7035				STANDARD P/N: ST128055W		ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOLERANCES UNLESS SPECIFIED		.XX ± 0.03		.XXX ± 0.010		
MATERIAL: POLYCARBONATE				STAHLIN www.stahlin.com Robroy Enclosures 500 Maple Street Belding, Michigan 48809 Phone: 616-794-0700 Fax: 616-749-3378										
REVISION HISTORY														
REV	DESCRIPTION		DATE			ENG	DRAWN BY		DATE	CUSTOMER		DWG		
-	-		-			-	E91		02/08/18			ST128055W		
-	-		-			-								
-	-		-			-								
-	-		-			-								
-	-		-			-								
-	-		-			-								
-	-		-			-								
-	-		-			-								
						SCALE DO NOT SCALE				DESCRIPTION STANDARD ENCLOSURE			PART NUMBER FEST128055W	