


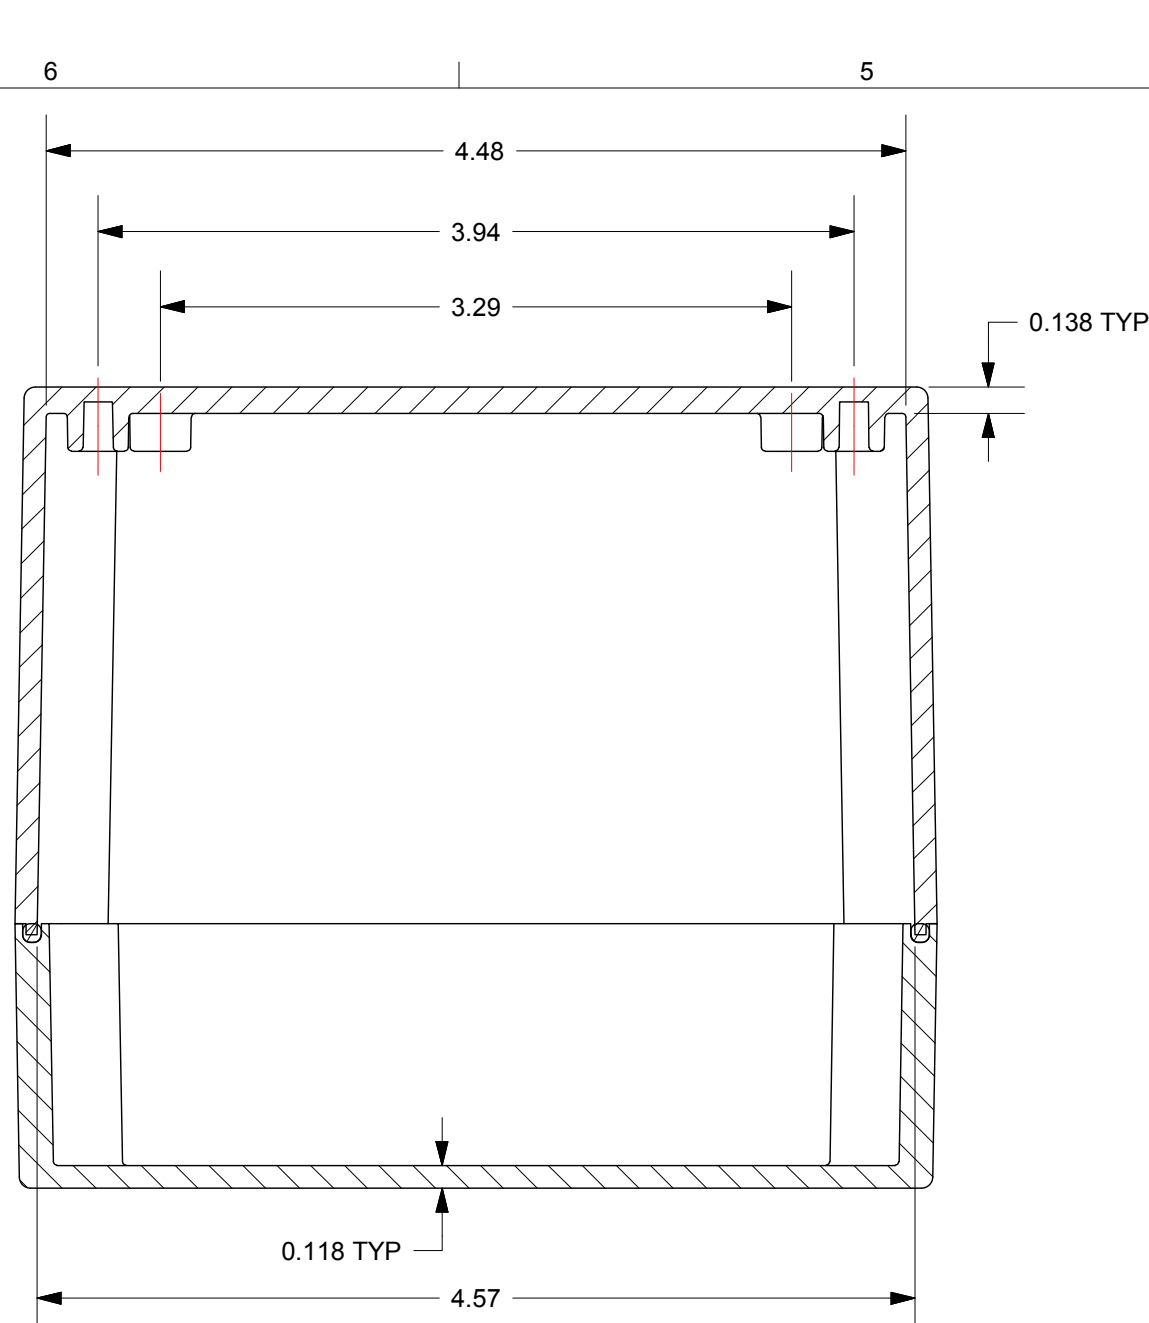
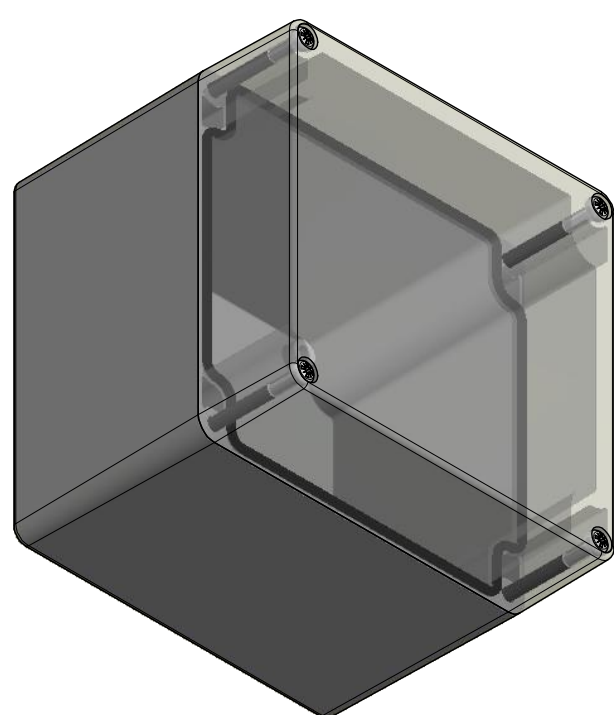
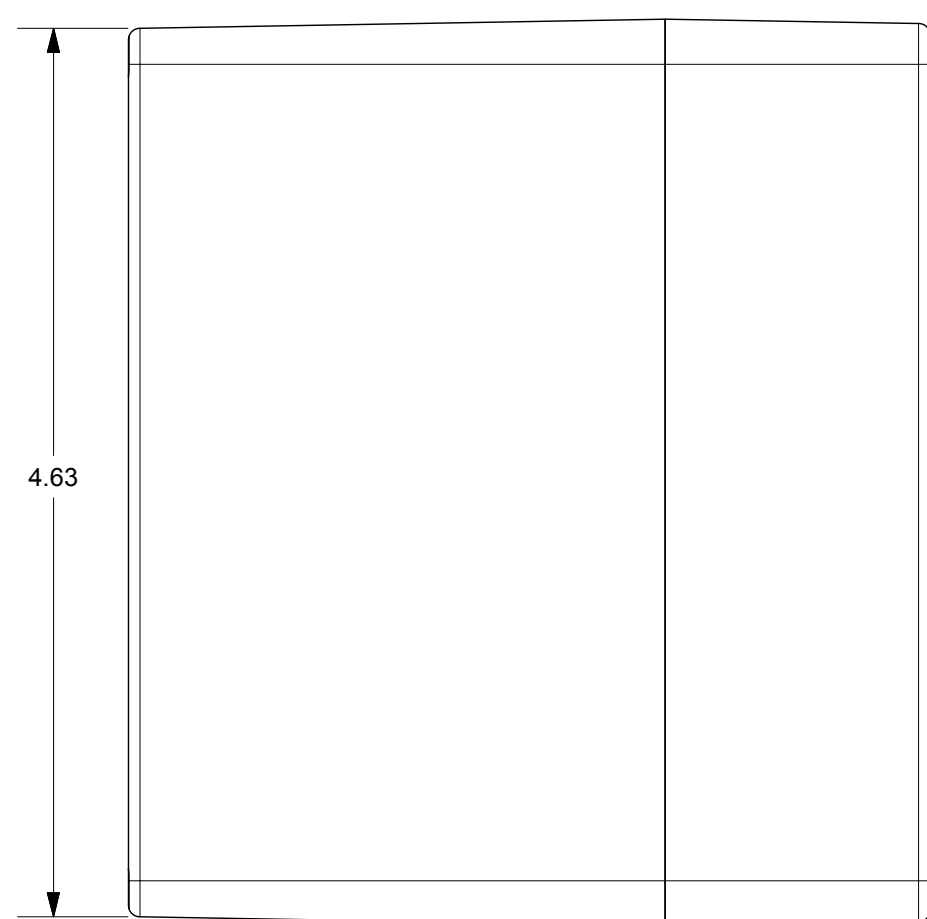
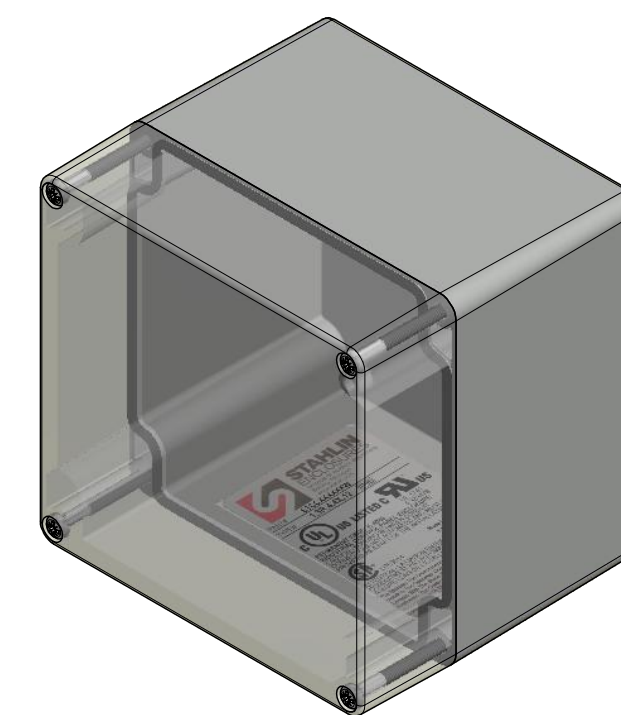


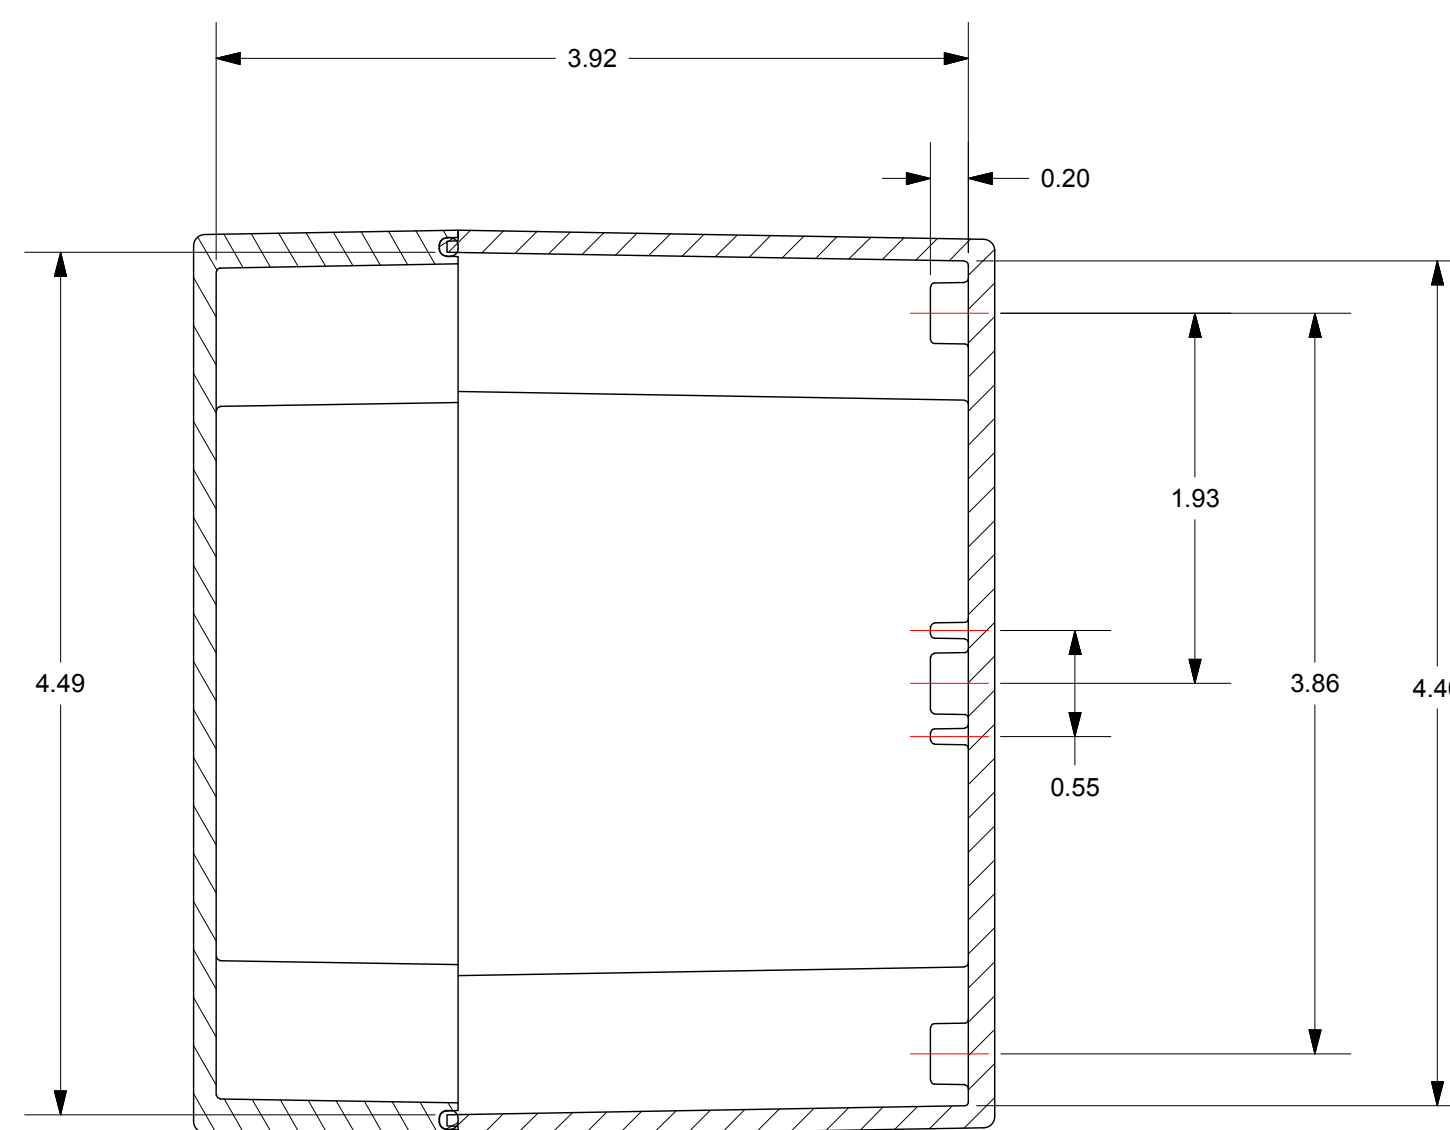

SECTION A-A

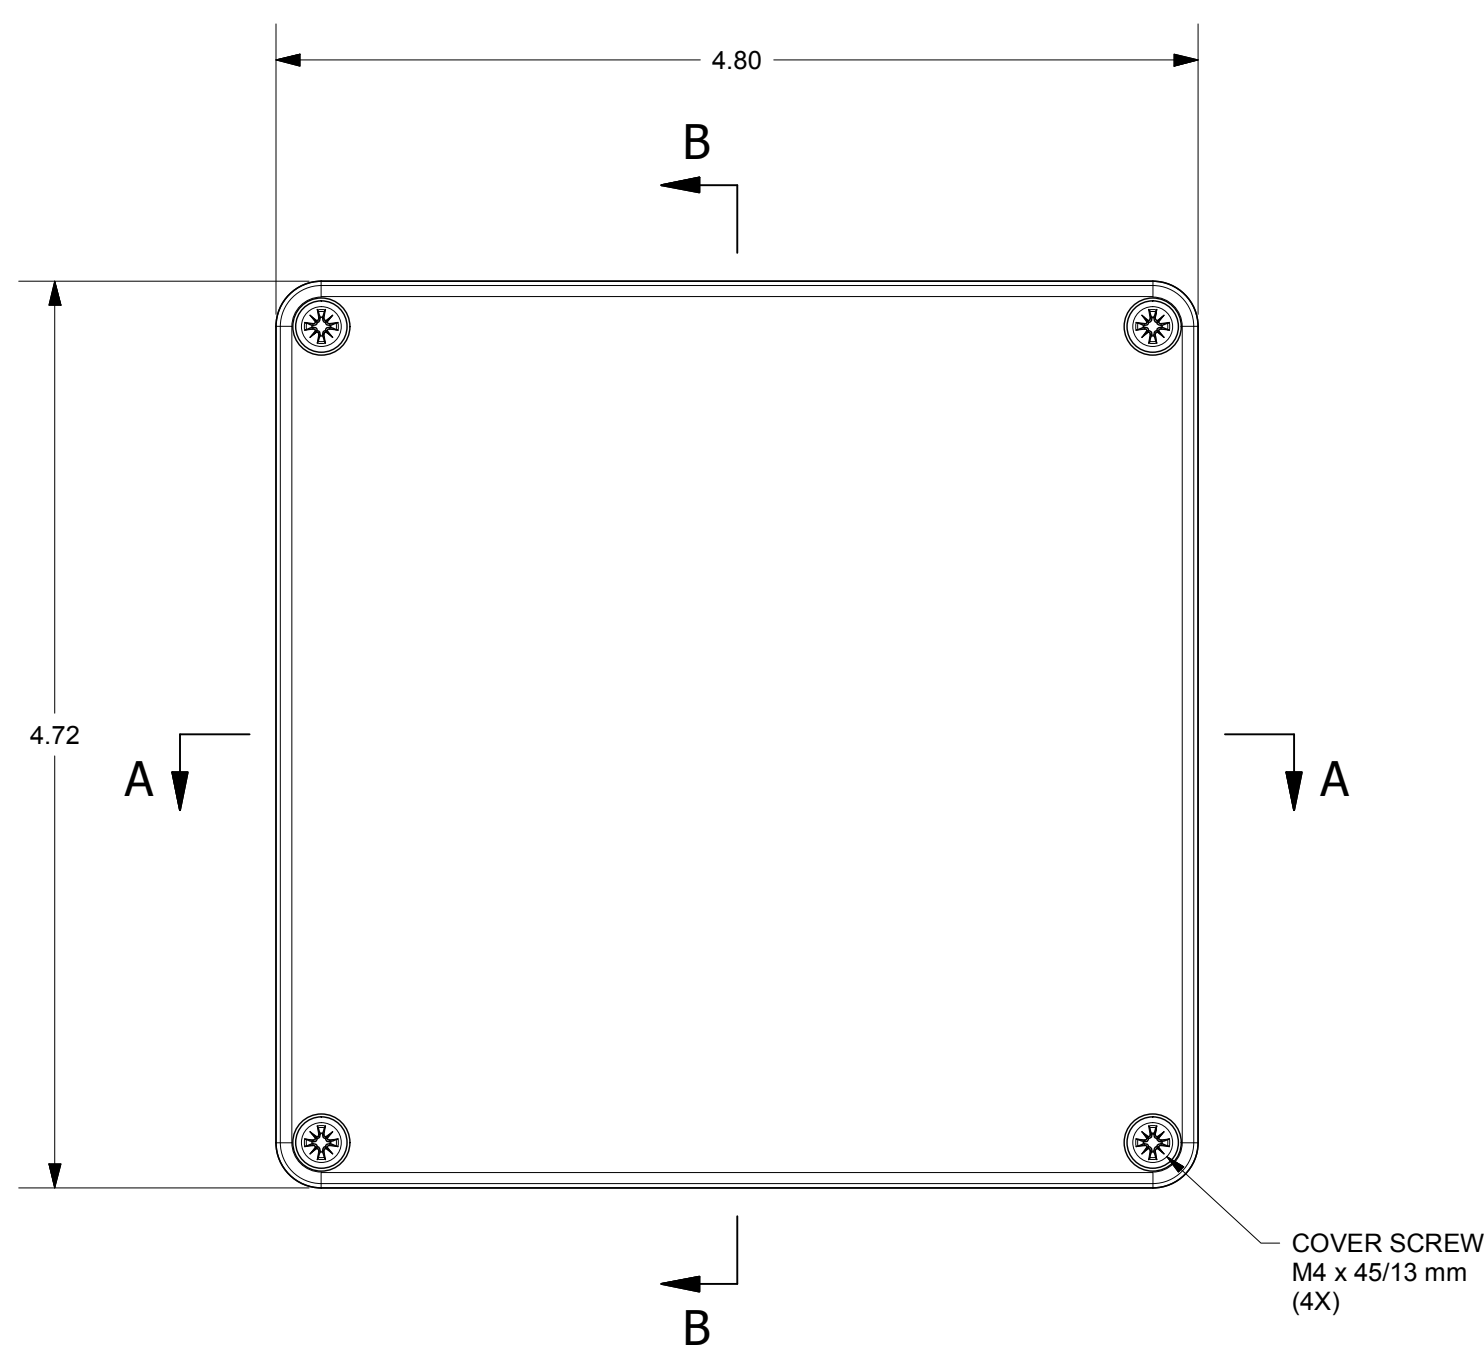

SECTION B-B

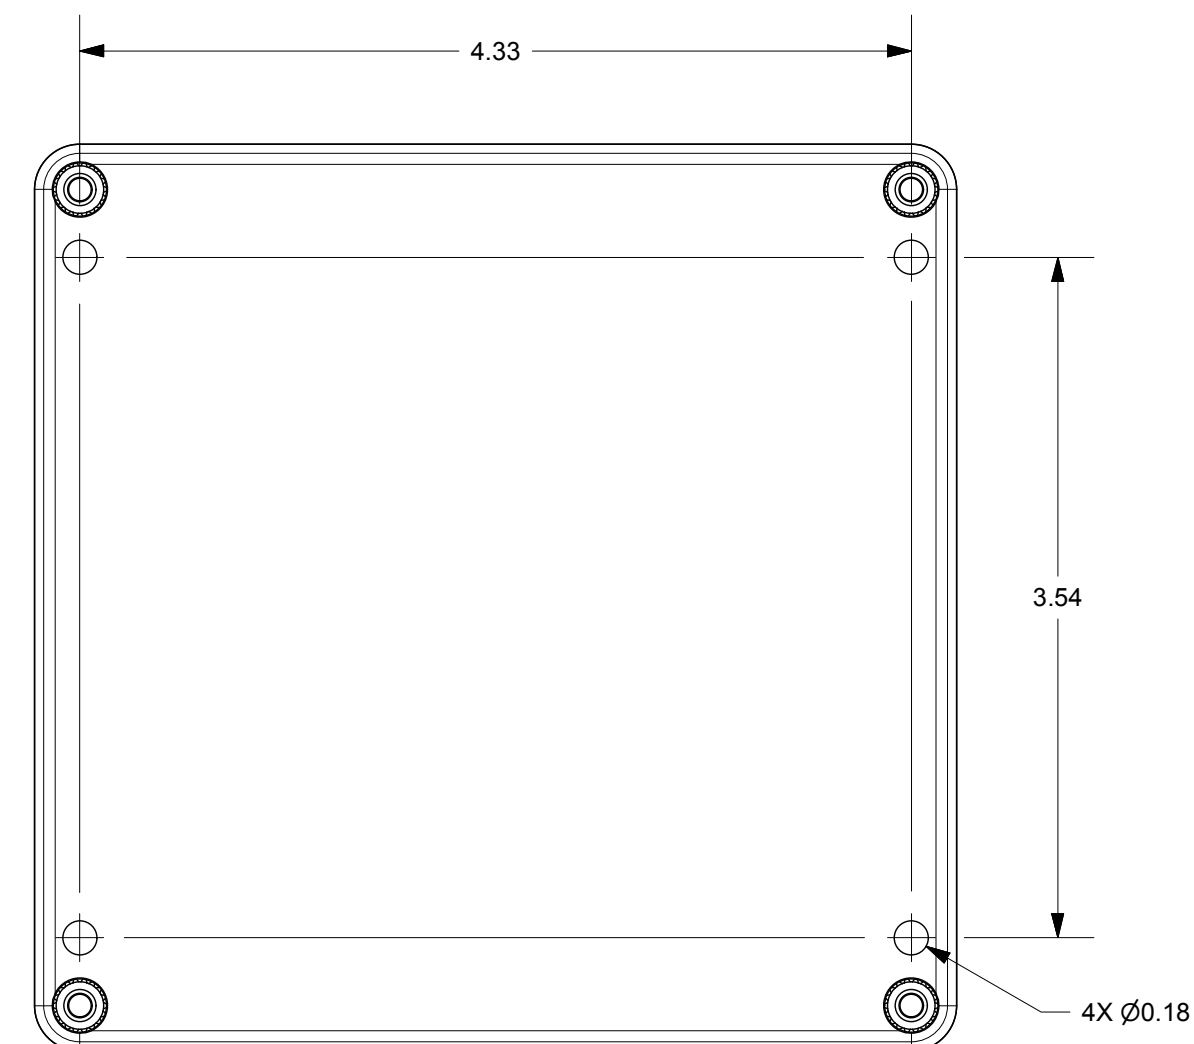

END USER NOTES:
1. TORQUE COVER SCREWS TO 9-17 IN.-LBS. TO MAINTAIN RATINGS

THIS DRAWING IS THE SOLE AND EXCLUSIVE
PROPERTY OF ROBROY ENCLOSURES.
NO PART OF THIS DRAWING MAY BE
REPRODUCED, DISTRIBUTED, OR PUBLICALLY
DISPLAYED IN ANY FORM OR BY ANY MEANS
WITHOUT THE EXPRESS WRITTEN
PERMISSION OF ROBROY ENCLOSURES.
ALL RIGHTS RESERVED
UNDER THE COPYRIGHT LAWS.
COPYRIGHT © 2017 ROBROY ENCLOSURES

SPECIAL REQUIREMENTS

NEMA 250: TYPE 1 3R, 4, 4X, 12 IEC 60529: IP66 COLOR: LIGHT GREY COLOR STANDARD:RAL 7035				STANDARD P/N: STCC121211W CUSTOMER DWG:		ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOLERANCES UNLESS SPECIFIED		.XX .XXX @ 0.03 @ 0.010	
MATERIAL: POLYCARBONATE REVISION HISTORY				 STAHLIN www.stahlin.com							
REV	DESCRIPTION			DATE	ENG	DRAWN BY E91		DATE 02/08/18	CUSTOMER		DWG STCC121211W
-	-			-	-	SCALE		DESCRIPTION	PART NUMBER	Robroy Enclosures 500 Maple Street Belding, Michigan 48805 Phone: 616-794-0700 Fax: 616-749-3378	
-	-			-	-	DO NOT SCALE		STANDARD ENCLOSURE		FESTCC121211W	
-	-			-	-						
-	-			-	-						
-	-			-	-						
-	-			-	-						

STAHLIN | **Robroy Enclosures**
500 Maple Street
Belding, Michigan 48809
Phone: 616-794-0700
Fax: 616-749-3378
www.stahlin.com